

LEFT EXTERIOR HALL
HALL
OPENING
HALL OPENING
ADJACENT PROPERTY LINE
5-10' HIGH STRUCTURE
TYPE Vb TABLE 1003.4 & 10.10

NOTE: NO ROOF PENETRATIONS
WITHIN 90' OF INTERIOR SIDE OF
THIS BLOCK WALL

LEFT EXTERIOR HALL
HALL
OPENING
HALL OPENING
ADJACENT PROPERTY LINE
5-10' HIGH STRUCTURE
TYPE Vb TABLE 1003.4 & 10.10


FRONT EXTERIOR HALL
HALL
OPENING
HALL OPENING
ADJACENT PROPERTY LINE
5-10' HIGH STRUCTURE
TYPE Vb TABLE 1003.4 & 10.10

FLOOR PLAN
1/8" = 1'-0"

N

EXT. WALL LEGEND
- 12" CMU
- 8" CMU
- 4" CMU

A-1.0

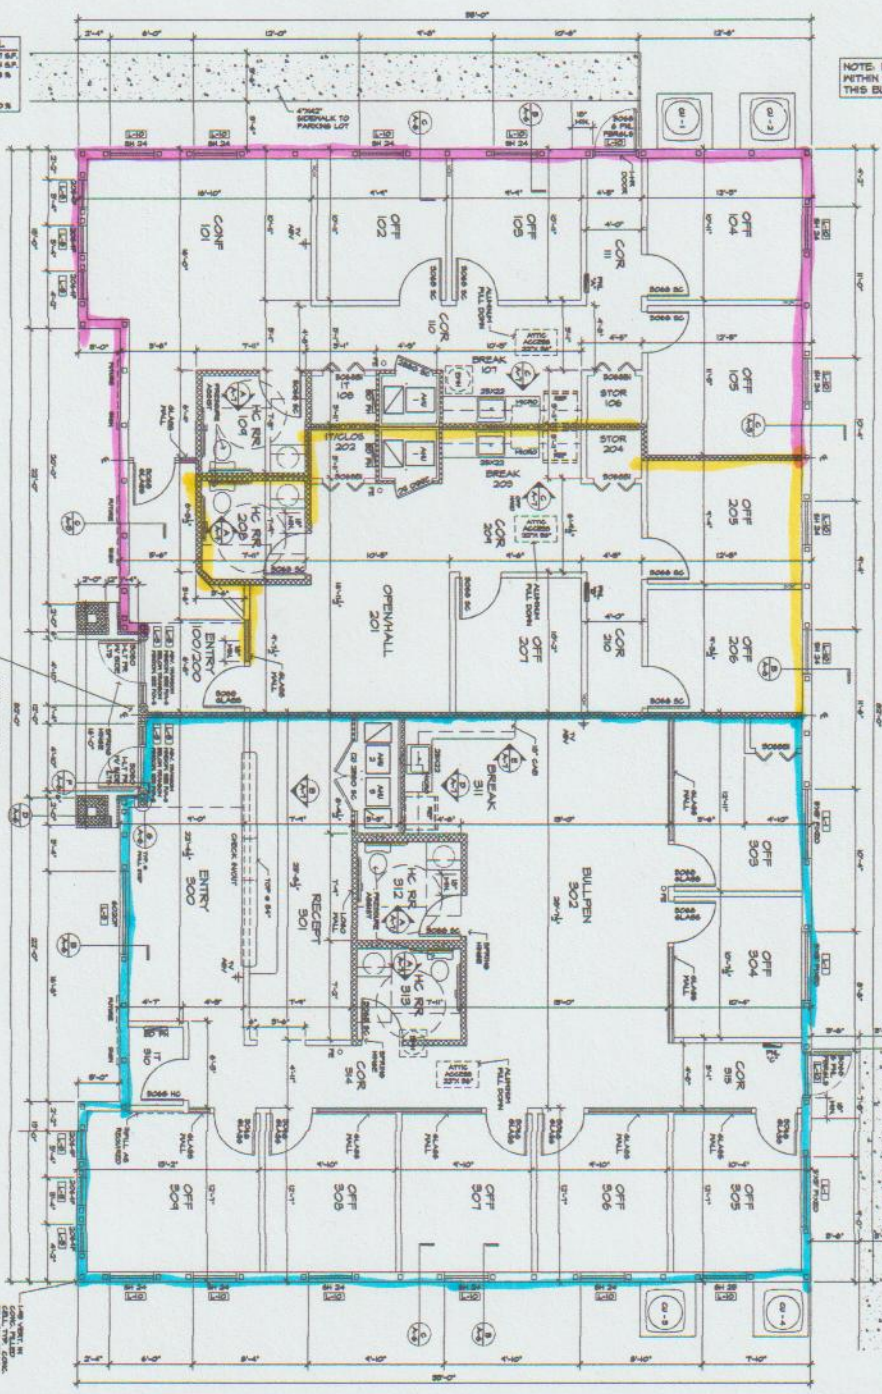

INTERIOR MALL LEGEND		INTEL SCHEDULE		CONCRETE & COATING SCHEDULE		DIMENSION NOTES	
1	INTERIOR MALL	1	TYPE DESIGNATION	1	THICKNESS	1	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
2	INTERIOR MALL	2	TYPE DESIGNATION	2	THICKNESS	2	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
3	INTERIOR MALL	3	TYPE DESIGNATION	3	THICKNESS	3	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
4	INTERIOR MALL	4	TYPE DESIGNATION	4	THICKNESS	4	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
5	INTERIOR MALL	5	TYPE DESIGNATION	5	THICKNESS	5	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
6	INTERIOR MALL	6	TYPE DESIGNATION	6	THICKNESS	6	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
7	INTERIOR MALL	7	TYPE DESIGNATION	7	THICKNESS	7	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
8	INTERIOR MALL	8	TYPE DESIGNATION	8	THICKNESS	8	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
9	INTERIOR MALL	9	TYPE DESIGNATION	9	THICKNESS	9	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE
10	INTERIOR MALL	10	TYPE DESIGNATION	10	THICKNESS	10	ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE

DESIGN DATA	
1	1. BUILDING MATERIALS, FINISHES AND ALL OTHER MATERIALS SHALL BE AS SHOWN ON THE DRAWINGS.
2	2. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
3	3. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
4	4. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
5	5. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
6	6. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
7	7. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
8	8. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
9	9. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.
10	10. ALL DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE.

DESIGNER: KELLY E. LYONS
DATE: 09.21.17
PROJECT: 17-000000-0000
SHEET: 17-000000-0000

CONC. BLOCK FIRE RATING
1. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
2. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
3. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
4. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
5. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
6. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
7. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
8. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
9. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
10. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.

ROOF PENETRATIONS
1. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
2. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
3. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
4. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
5. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
6. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
7. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
8. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
9. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
10. ALL ROOF PENETRATIONS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.

ADDITIONAL OPTION NOTES
1. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
2. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
3. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
4. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
5. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
6. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
7. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
8. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
9. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.
10. ALL CONCRETE BLOCK WALLS SHALL BE RATED FOR A MINIMUM OF 2 HOURS.

WATERFORD
17-000000-0000
09.21.17
09:41:00
-05'00'

SQUARE FOOTAGE CALC
BUILDING S.F.: 446.2
FRONT PORCHES S.F.: 66
TOTAL BUILDING UNDER ROOF S.F.: 420.0
NUMBER OF TENANT SPACES: 9
LEFT SIDE S.F.: 115
CENTER S.F.: 466
RIGHT SIDE S.F.: 208

NOTE: THIS PROJECT REQUIRES "LIGHT FRAME TIE-ROD CONSTRUCTION" SHOWN PER FIG. 605.021.