


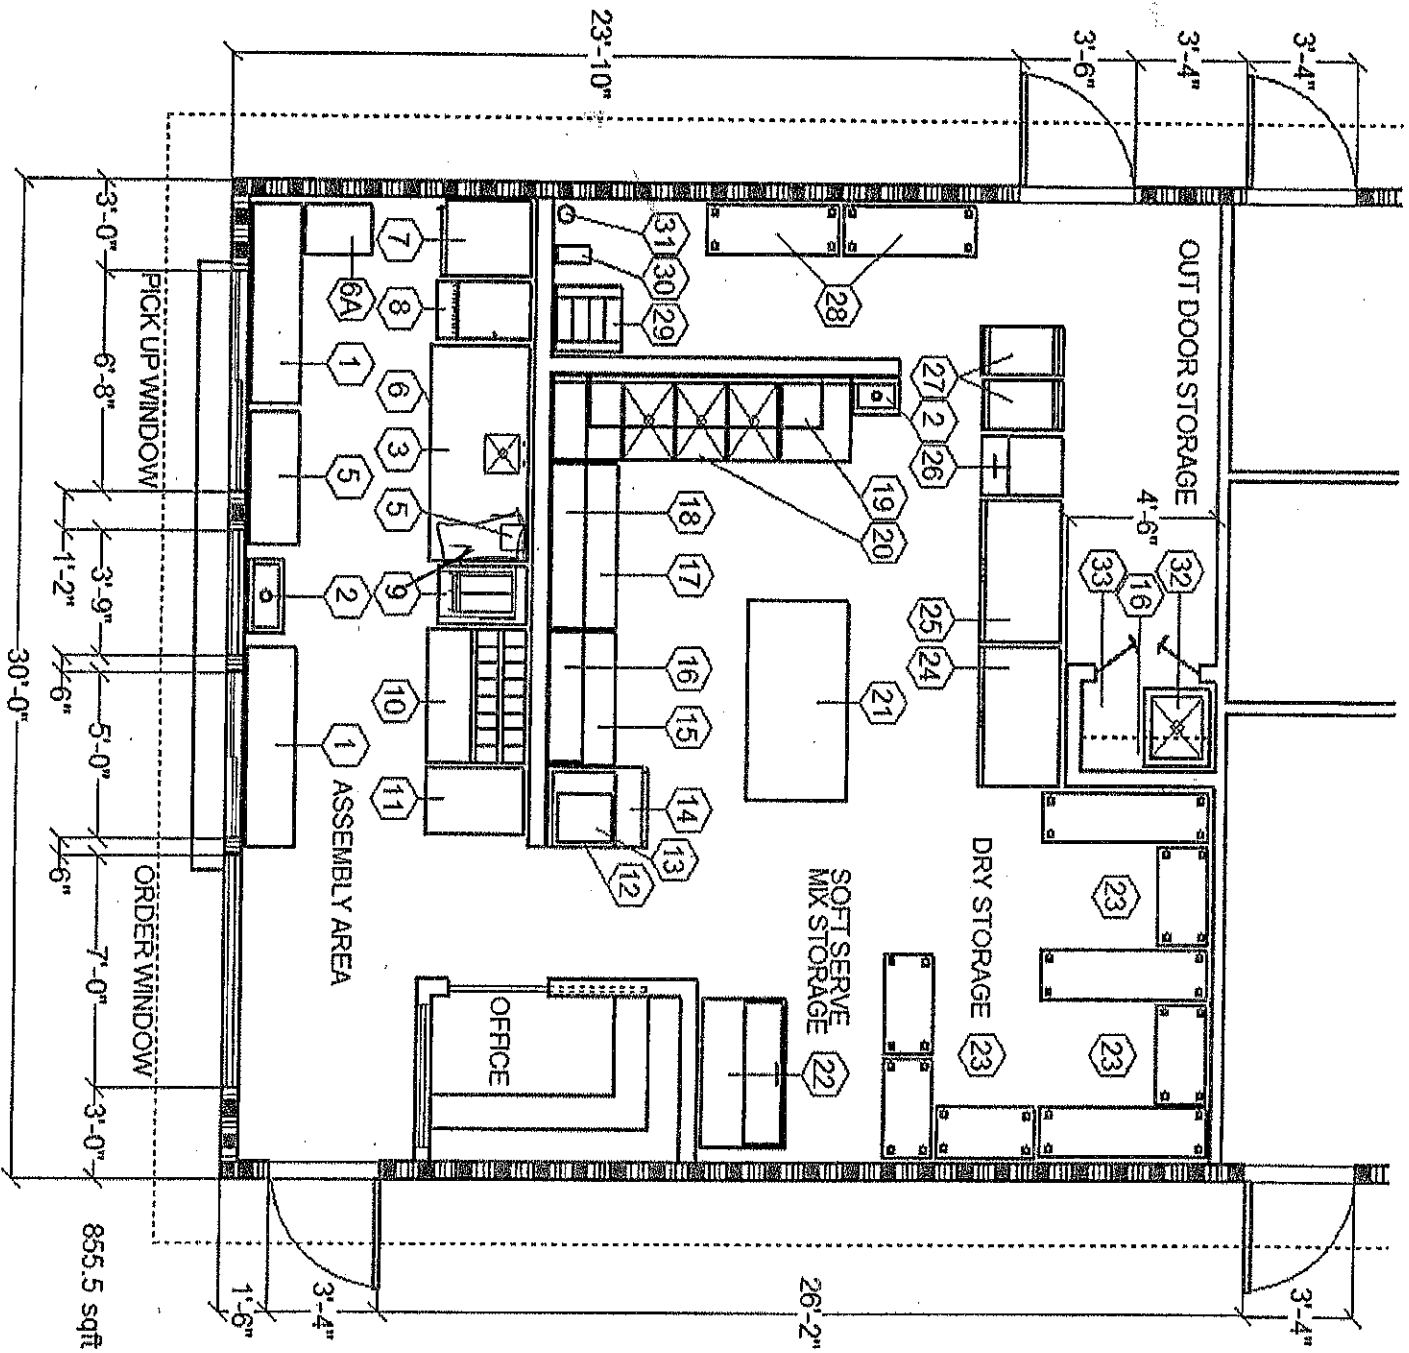

International Restaurant Distributors, Inc.
 150 Semoran Commerce Pl.
 Apopka, FL 32703
 (407) 886-6661

PROJECT INFO:

BUZ UNDERILL
 SOFT SERVE ICE CREAM
 SEBASTIAN, FLORIDA

DATE: 6/2/2022
 DRAWN BY: SINW
 SCALE: N/A
 REVISION: 1

SHEET: 2 of 3

2

EQUIPMENT SCHEDULE

ITEM NUMBER	QUANTITY	DESCRIPTION
1	2	STORAGE CABINETS 18"x72" WITH 2 SHELVES
2	2	HAND SINK WITH SIDE SPLASH
3	1	CUSTOM FAB 78"x36" MIX. STAGE AND FINISH TABLE
4	6	CUP DISPENSER
5	1	BLENDER
6	3	TRASH CAN
6A	1	16"x24" STAINLESS WALL MOUNTED SHELF
7	1	ONE GLASS DOOR FREEZER
8	1	SODA DISPENSER WITH SIX FLAVOR ADD 24"x30" TABLE
9	1	SOFT SERVE FREEZER
10	1	48" THREE TIER TOPPING FOUNTAINETT
11	2	TABLES 24"x30", ONE TO SET ITEM 8 ON
12	1	20"x30" MICROWAVE SHELF
13	1	MICROWAVE OVEN 1,000 WATTS
14	1	WORK TOP REFRIGERATOR
15	1	WORK TABLE STAINLESS 24"x48"
16	1	STAINLESS WALL MOUNTED SHELF 12"x48"
17	1	WORK TABLE STAINLESS 24"x60"
18	1	STAINLESS WALL MOUNTED SHELF 12"x60"
19	1	STAINLESS WALL MOUNTED SHELF 12"x84"
20	1	3 COMPARTMENT POT SINK
21	1	36"x60" STAINLESS WORK TABLE MOBILE
22	1	SOFT SERVE MIX STORAGE COOLER
23	LOT	WIRE SHELVING FOR DRY STORAGE
24	1	TWO DOOR FEEDER
25	1	TWO DOOR COOLER
26	1	ICE MAKER
27	2	MOBILE UTILITY CART
28	2	SEE ITEM 23 SPK. SHEET
29	1	SYRUT BAGS BACK BY VENDOR
30	1	CARBONATOR BY VENDOR
31	1	CO2 TANK BY VENDOR
32	1	FLOOR MOUNTED CAN WASH BY G.C.
33	1	CAN WASH WITH CHEMICAL AND MOP BUCKET STORAGE



International Restaurant Distributors, Inc.
150 Semoran Commerce Pl.
Apopka, FL 32703 (407) 880-0001

PROJECT INFO:

BUZ UNDERILL
SOFT SERVE ICE CREAM
SEBASTIAN, FLORIDA


DATE: 6/2/2022
DRAWN BY: SJW
SCALE: N/A
REVISION: 3

SHEET: 3 of 3


3

DIMENSION PLAN

0.000.000, 0.000.000

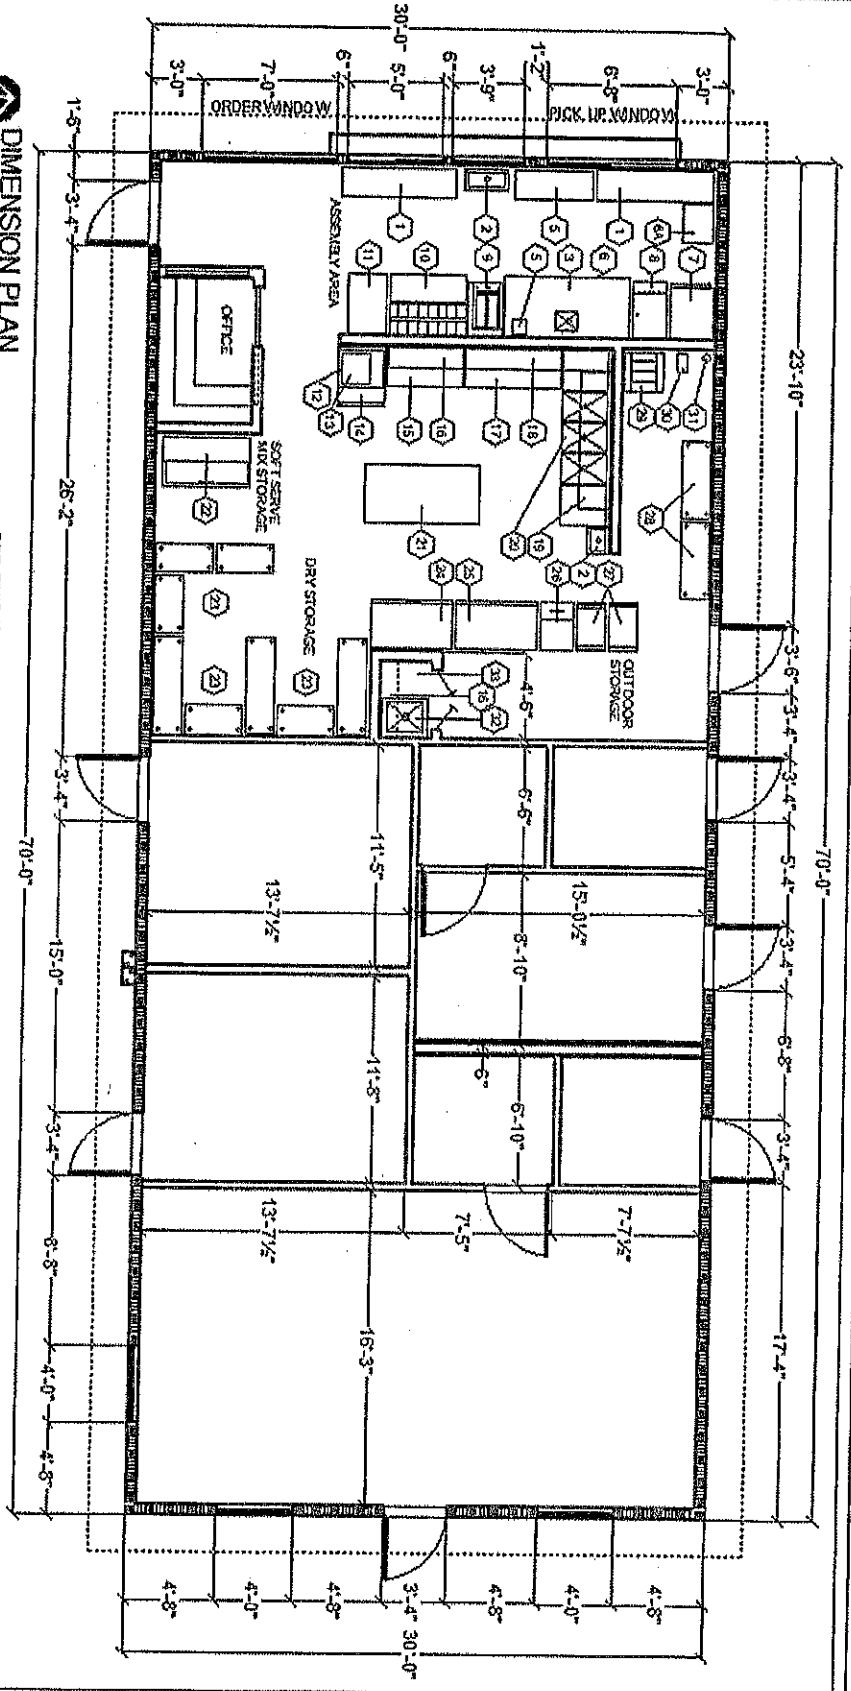


HARDE PLANK LAP SDOING

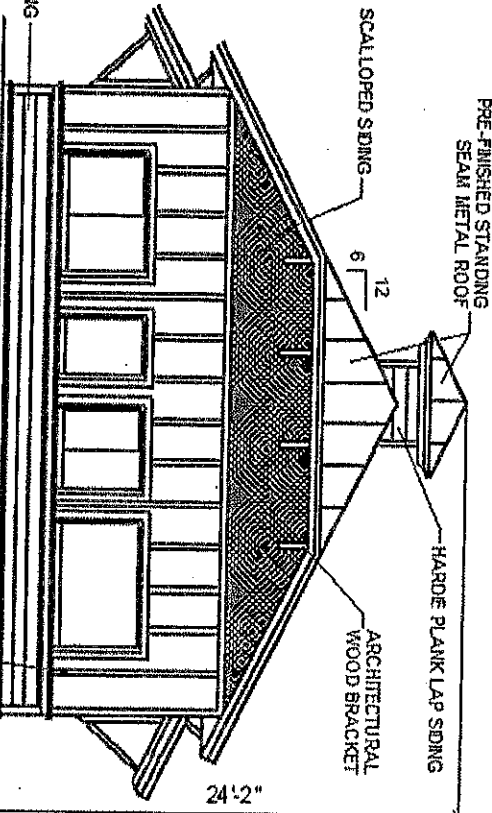

WEST SIDE ELEVATION

HARDE BOARD PANELING



SCALLOPED SDOING

PRE-FINISHED STANDING SEAM METAL ROOF

HARDE PLANK LAP SDOING

ARCHITECTURAL WOOD BRACKET

TRUSS BEARING

TOP OF CUPOLA

TOP OF ROOF

BUZ UNDERILL

SOFT SERVICE ICE CREAM

SEBASTIAN, FLORIDA

PROJECT INFO:


IRD

International Restaurant Distributors, Inc.
150 Semoran Commerce Pl.
Apopka, FL 32703 (407) 880-6601

SHEET: 1 of 3

1

DATE: 6/2/2022
DRAWN BY: SMW
SCALE: N/A
REVISION: 1

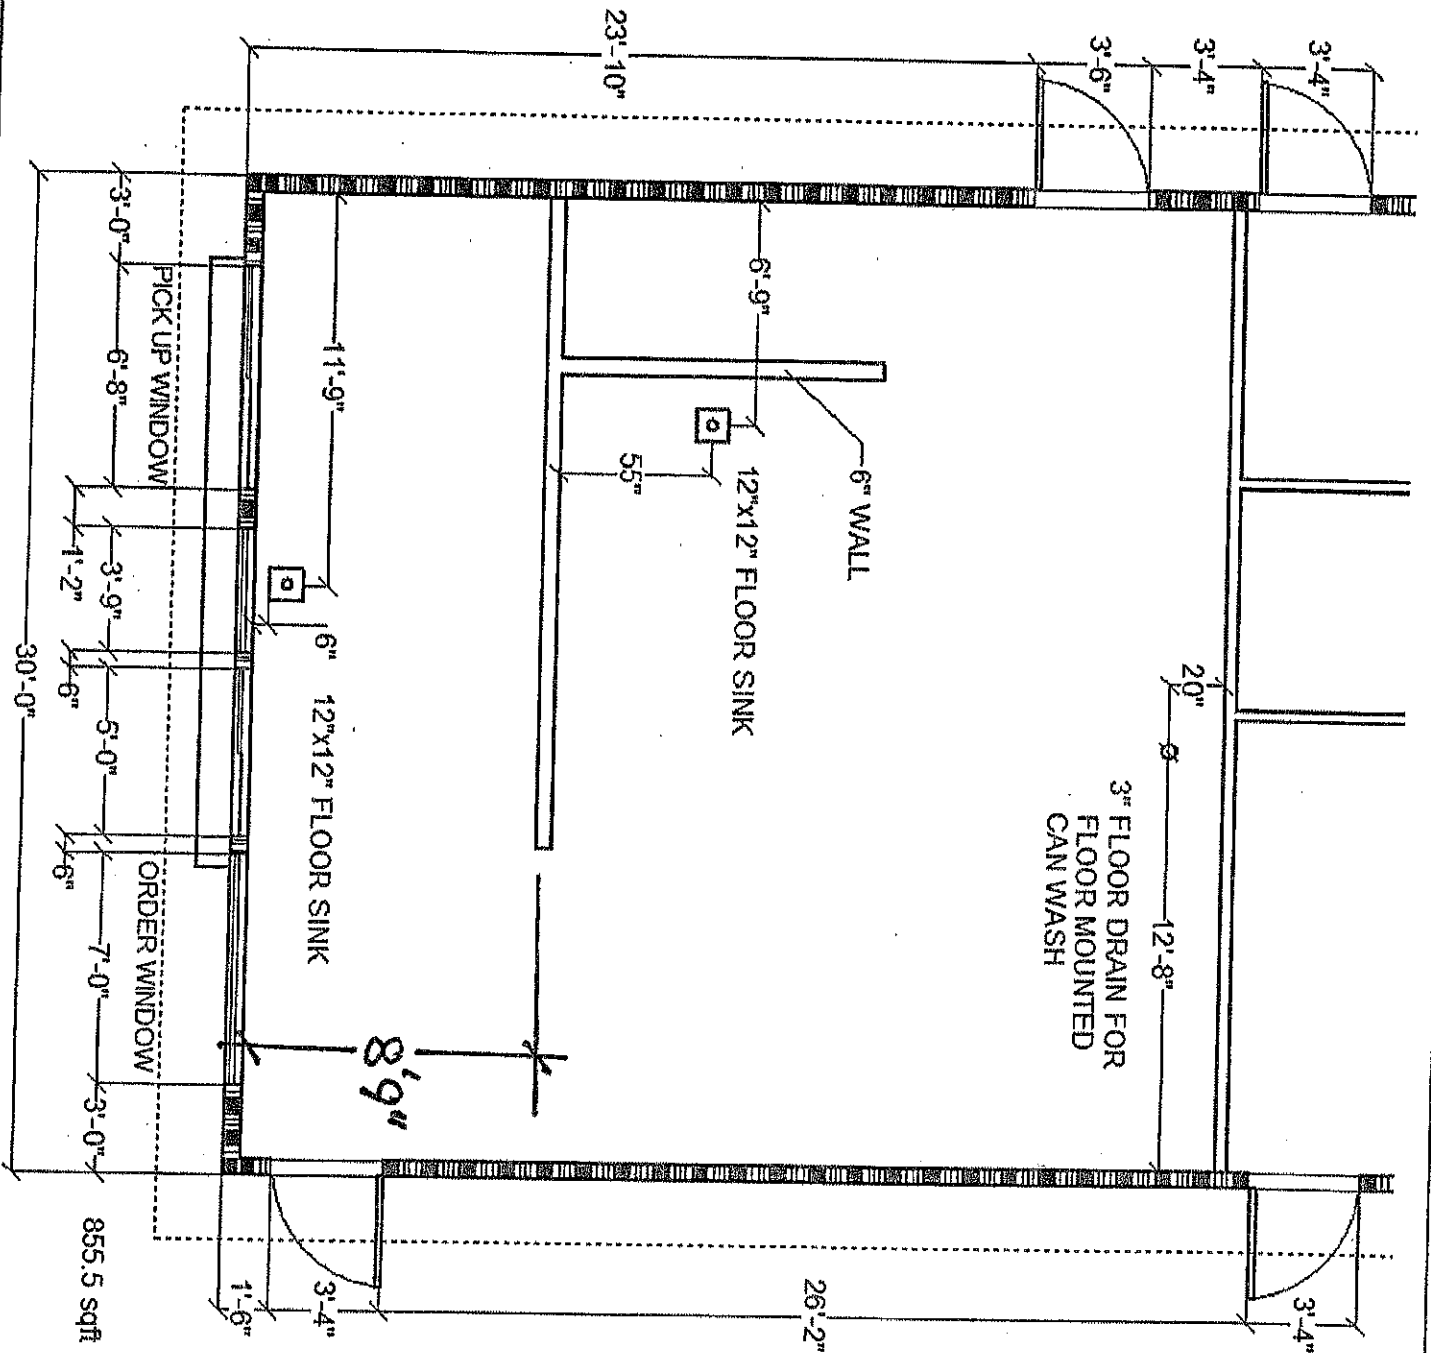

IRD
 International Restaurant Distributors, Inc.
 160 Semoran Commerce Pl.
 Apopke, FL 32703
 (407) 880-6091

PROJECT INFO:

BUZ UNDERILL
 SOFT SERVE ICE CREAM
 SEBASTIAN, FLORIDA

DATE: 6/1/2022
 DRAWN BY: SAW
 SCALE: N/A
 REVISION: 3


SHEET: 1 of 1

1

AVAMIX

AvaMix BX1GRG 3 3/4 hp 1 Gallon Stainless Steel Heavy Duty Commercial Food Blender - 120V

#928BX1GRG



Technical Data

Width	12 Inches
Depth	11 Inches
Height	22 Inches
Phase	1 Phase
Voltage	120 Volts
Wattage	1800 Watts
Blender Jar(s)	1 jar
Capacity	1 Gallons
Control Type	Keypad
Drinks per Day	75 or More
Features	NSF Listed
Horsepower	3 3/4 HP
Jar Type	Stainless Steel
Plug Type	NEMA 5-15P
Product Line	AvaMix BX
RPM	26000 RPM
Speeds	3
Usage	Food and Drink Blending Food Blending

Features

- 3 3/4 hp, up to 26,000 RPM motor; 3 speed settings and a pulse switch ensure easy operation
- Slow start blending motor breaks down larger foods before blending ensuring blending consistency
- Heavy-duty stainless steel blades blend sauces, dips, spreads, and smoothies in seconds
- 1 gallon stainless steel container with 2-piece lid and 2 handles for extra convenience
- 120V, 1800W

Certifications



ETL US &
Canada



NSF
Listed



Hand Wash Only



5-15P

Notes & Details

The AvaMix BX1GRG high volume commercial food blender will have you whipping up large batches of sauces, dips, salsa, and smoothies in no time! This blender boasts a powerful 3 3/4 hp motor that operates at 26,000 RPM on its highest speed. An impressive motor will make this model the workhorse of your kitchen that can handle the toughest blending jobs. It's the perfect combination of power and control that will handle any blending job, making your life easier in the kitchen and expanding your menu possibilities.

With 3 speed options from low to high, as well as a pulse button that allows you to throttle quick bursts of power when needed, this model gives you complete control over the blending process. The blender utilizes slow start blending in order to break down larger ingredients before getting up to blending speeds. This not only prevents messes but also takes some of the strain off of the motor to help increase its overall lifespan.

With a hefty 1 gallon capacity jar, you'll find yourself loading up the blender much less frequently than on traditional, smaller blenders. The jar features two integrated handles to provide more stability as you are transporting and pouring from it. Made of durable stainless steel, this blender jar will hold up to the wear-and-tear of a commercial kitchen and provide corrosion resistance to keep your equipment and your products looking great. Plus, as opposed to plastic jars that are prone to scratching, clouding, and hazing, this stainless steel jar is much more durable and has a greater temperature tolerance. This makes it useful for storing contents in a refrigerator or for blending hot soups.

A clasp fitted onto the jar attaches to, and locks down, the lid to avoid overflow and make blending hot liquids safer. The 2-piece lid design allows you to add ingredients while blending without having to remove the lid or stop the motor. Just simply remove the clear center plug and replace it when you are finished adding ingredients. Non-skid feet at the base of the blender help to further eliminate the probability of movement and spillage during operation. This unit requires 120V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.



Item #: 178GDC24FHCB Project: _____

Qty: _____ Date: _____ Approval: _____



Avantco GDC-24F-HC 31" Black Swing Glass Door Merchandiser Freezer with LED Lighting

Item #178GDC24FHCB



Technical Data

Width	31 1/8 Inches
Depth	33 1/4 Inches
Height	87 Inches
Interior Width	25 3/16 Inches
Interior Depth	28 3/8 Inches
Interior Height	62 Inches
Caster Diameter	4 Inches
Amps	4.9 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	2731 BTU
Capacity	22.32 cu. ft.
Casters	With Casters
Color	Black
Compressor Location	Bottom Mounted
Door Style	Swing
Door Type	Glass
Dutch Half Doors	Without Dutch Half Doors
Features	Customizable LED Lighting Lighted Interior Self-Closing Doors
Horsepower	1 HP
Individual Shelf Capacity	90 lb.
Interior Color	White
Number of Doors	1 Doors
Number of Shelves	4 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Sections	1 Section
Temperature Range	-7 - 0 Degrees F
Type	Merchandising Refrigeration

Features

- 1 self-closing, anti-fog dual-pane tempered glass swing door with magnetic gaskets
- Easy-to-use digital temperature controls, temperature range: -7 - 0
- Includes 4 adjustable, plastic-coated steel shelves
- Interior LED lighting; 4" casters included
- 115V, 1 hp, R290 refrigerant
- Includes 4" Casters

Certifications



ETL US




5-15P



Customizable

Avantco Refrigeration

Plan View

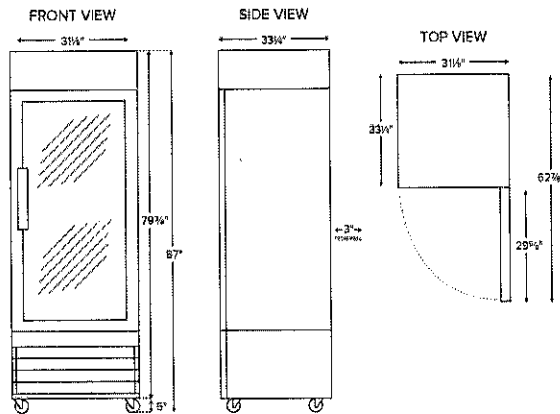


Notes & Details

Increase impulse sales of frozen meals, novelty treats, fruits, and vegetables with this Avantco GDC-24F-HC 31 1/8" black merchandising freezer! Designed with sharp looks and usability in mind, this unit is the perfect display for your products with its sleek finish. And, since the housing is made from black coated steel, you can be sure that it will provide superior durability. This unit boasts an anti-fogging, dual-pane tempered glass swing door to ensure that customers always have a clear view of your products, while 4 epoxy coated steel shelves help you stay organized. Plus the shelves easily adjust to accommodate prepackaged foods in a variety of sizes. Interior LED lighting also works to illuminate and further merchandise your products.

Designed to maintain temperatures from -8 to -1 degree Fahrenheit, this freezer boasts a bottom-mounted 1 hp compressor that runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include self-closing aided by magnetic gaskets, automatic defrosting, as well as a digital temperature control and display. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.

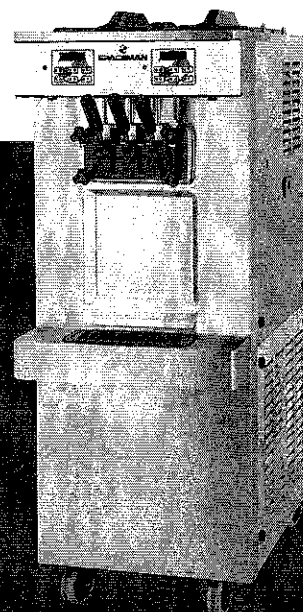

6250-C/6250A-C

SOFT SERVE FREEZER

Two Flavor, Floor, Digital Control
A: Pump Feed Model



Powerful and Versatile

Two flavor medium capacity floor model for ice cream, frozen yogurt and much more

Fast Freeze Down

Patented high efficiency heat exchanger allows fast freeze down with low energy consumption

Digital Control and Display

Microprocessor control provides access to system settings and additional functions. Digital interface displays critical info as system status, temperatures, dispense count, errors, etc.

Auto Programming

Allows automatic switching of operation modes based on preset schedules

Standby

Maintains product temperature in both mix hopper and freezing cylinder below 4.4°C (40°F) overnight

Hopper Agitator

Maintain product consistency and prevent product separation

Soft System Start

Slow motor start reduces equipment noise and stress on drive train

Direct Drive Transmission

Eliminates consumable moving parts and increases transmission efficiency

Safety Protections

- Low temperature and motor overload shutoffs to protect in the event of cylinder freeze up
- High pressure switch to prevent compressor overheating

Defrost for Cleaning

Increases efficiency during cleaning by heating frozen product in cylinder


Quick Freeze

Turn on freeze immediately to freeze down to serving viscosity when quick service is required after long idle period

Self-closing Valve with Speed Control



Automatically prevents product overflow after dispense; Provides flexibility in dispense rate control

Ideal for medium capacity outlets to serve ice cream, frozen yogurt, gelato or sorbet. Fully loaded with all standard options.



6250-C / 6250A-C

SOFT SERVE FREEZER

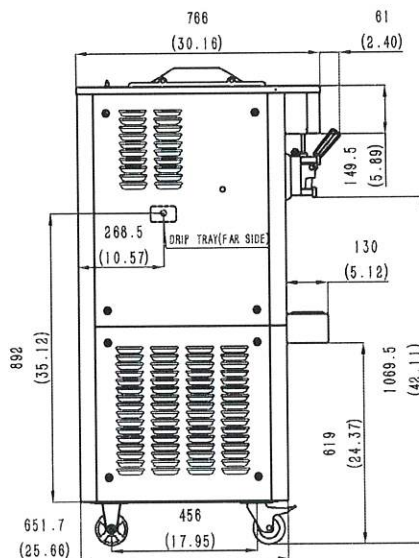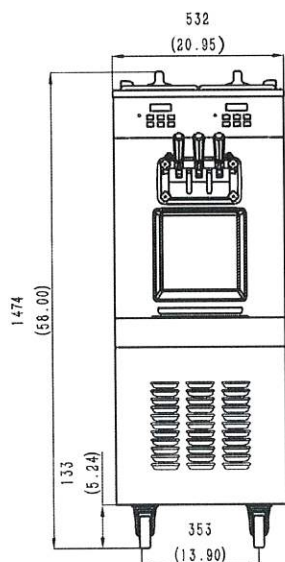

SPECIFICATIONS

Flavors	2 + Twist
Freezing Cylinders	2 x 1.7L / 1.8qt
Mix Hoppers	2 x 12L (8L for A)
Output Capacity (80 grams)	450 serves/hr
Clearance Requirements	152mm/6" on back

Weight	Kg/lb (Gravity)	Kg/lb (Pump)
Net	210 / 467	220 / 489
Shipping	230 / 511	240 / 533
Volume	0.90 CBM / 28.85 CBF	

Dimensions	Net (mm/in)	Shipping (mm/in)
Width	532 / 20.9	660 / 23.6
Depth	652 / 25.7	830 / 32.7
Height	1474 / 58.0	1640 / 64.6

Electrical	MFS	MCA	Power(kW)
220-240/50/1	20	16	3.2
208-230/60/1	20	18	3.5

FEATURES

Control Systems	Two, Digital
Refrigerated Hoppers	✓
Hopper Agitators	✓
Temperature Displays	✓
Standby Mode	✓
Auto Closing Dispensing Valves	✓
Dispensing Speed Control	✓
Low Mix Indicator Light & Alarm	✓
Low Temperature Protection	✓
Motor Overload Protection	✓
High Pressure Protection	✓
Defrost & Quick Freeze	✓
Soft Start	✓
Direct Drive Pump (A only)	✓


AVAILABLE OPTIONS

Water Cooled	✓
Top Air Discharge Chute	✓


WARING
COMMERCIAL

COMMERCIAL MICROWAVE OVENS


MEDIUM-DUTY .9 CUBIC FEET &
HEAVY-DUTY 1.2 CUBIC FEET

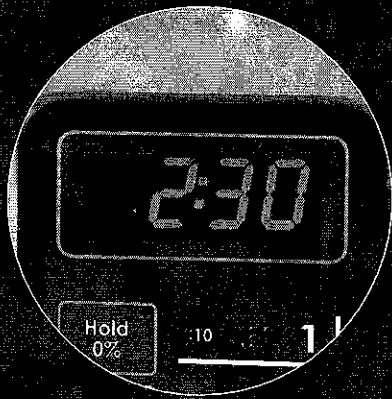


60-Minute Max Cook Time

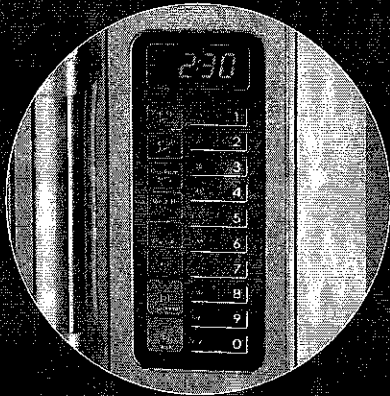


10 Programmable Memory Pads;
100 Programmable Settings

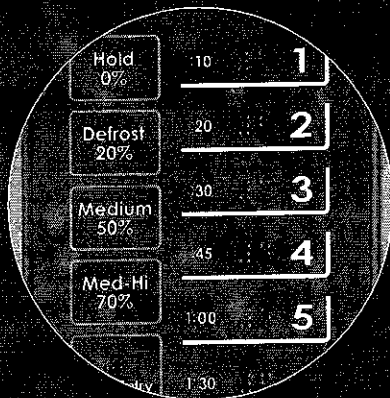

Touch Control Keypad
with Braille

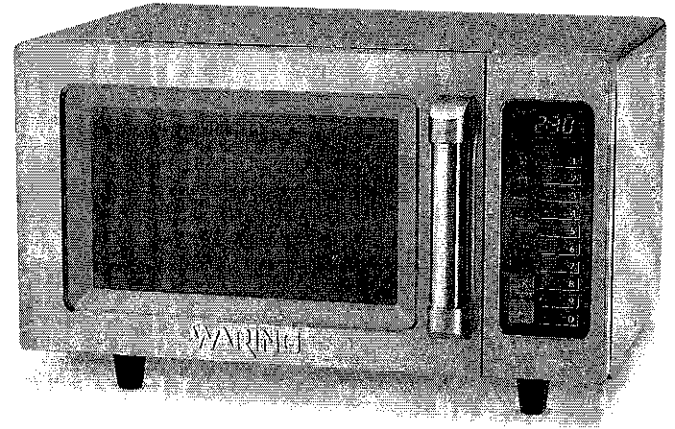


WMO90

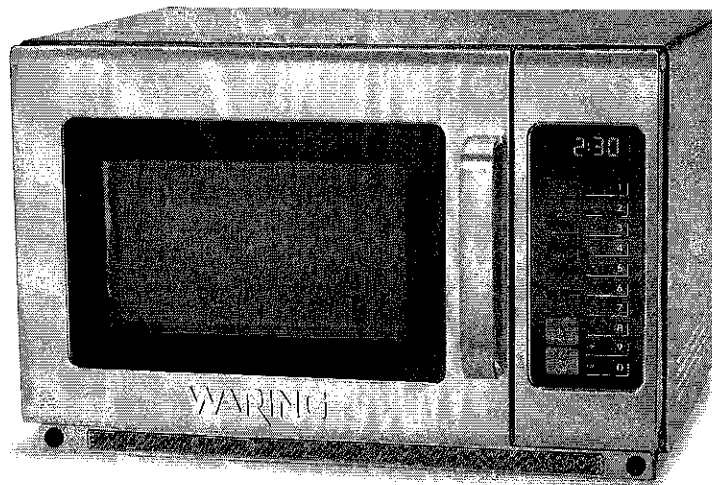

WMO120

- 10 programmable memory pads;
100 programmable settings
- Stainless steel construction
- Cleanable/replaceable air filter (WMO120 only)
- Stackable (WMO120 only)
- 3-stage cooking
- 5 power levels
- Programmable and manual operations
- Touch control keypad with Braille
- Interior oven light
- 60-minute max cook time
- **WMO90** - .9 cubic feet, 120V, 1000W
- **WMO120** - 1.2 cubic feet, 208/230V, 1800W
(Dual Magnetrons)

WMO Series

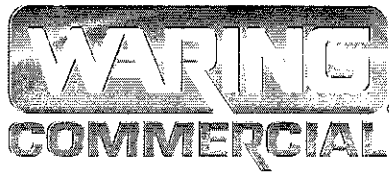

COMMERCIAL MICROWAVE OVENS

MEDIUM-DUTY .9 CUBIC FEET &
HEAVY-DUTY 1.2 CUBIC FEET

WMO90/WMO120

Touch control keypad

Provides 10 programmable memory pads for up to 100 program settings. Easy to clean and bright display make programming simple and easy.

ITEM	ELECTRICAL	LISTINGS	OUT OF BOX WEIGHT	OUT OF BOX DIMENSIONS W x D x H	USABLE INTERIOR DIMENSIONS W x D x H	CORD LENGTH	WARRANTY
WMO90	120 VAC, 1000W	cULus, ETL sanitation	38.95 lbs.	20" x 17" x 12.25"	11.75" x 11.75" x 8"	5 feet	Limited 1 Year 3-Year Magnetron
WMO120	208/230 VAC, 1800W	cULus, ETL sanitation	67.0 lbs.	22.6" x 20.7" x 14.5"	14.125" x 16" x 8.75"	5 feet	Limited 1 Year 3-Year Magnetron

ORDERING INFORMATION	#STD. PKG.	GIFTBOX WEIGHT	CUBIC FEET	BOX DIMENSIONS L x W x H	UPC	CASE PKG.	MC WEIGHT	MC DIMENSIONS L x W x H	MBC
WMO90	1	42.2	3.72	18.75" x 22.875" x 14.875"	040072037665	1	42.2 lbs.	18.875" x 22.875" x 14.875"	10040072037662
WMO120	1	70.0	6.09	22" x 25.125" x 17.625"	040072037672	1	77.05 lbs.	22.375" x 25.625" x 18.375"	10040072037679



@waringcommercial

waringcommercialproducts.com

©2018 Waring Commercial
314 Ella T. Grasso Avenue., Torrington, CT 06790
Tel. 800-492-7464 • Fax 860-496-9008
18WC050676






Avantco Refrigeration

Item #: 178SSWT48RHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco SS-WT-48R-HC 48" Two Door Worktop Refrigerator with 3 1/2" Backsplash

Item #178SSWT48RHC

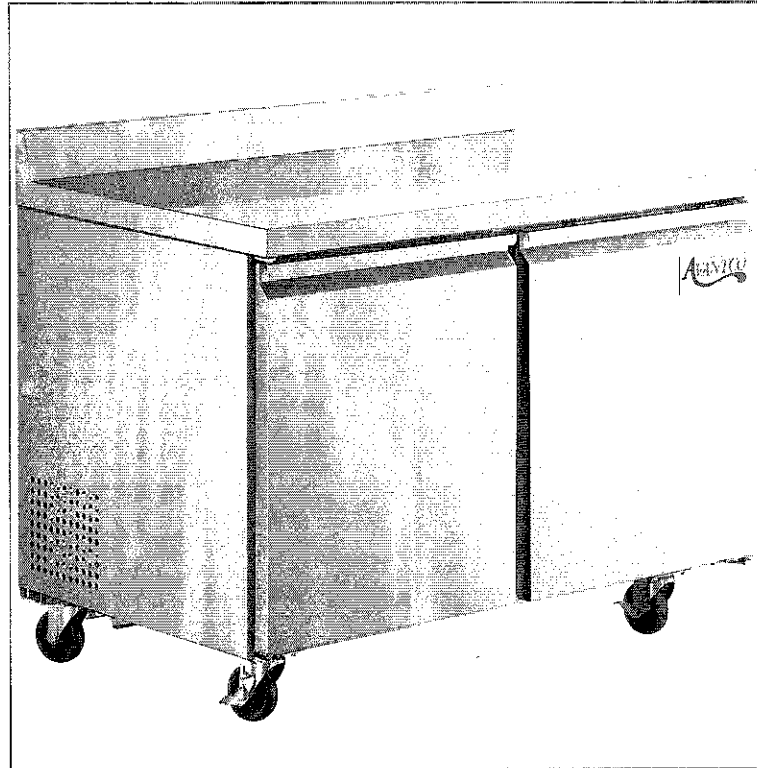

Technical Data

Width	47 1/4 Inches
Depth	29 1/2 Inches
Height	38 3/4 Inches
Interior Width	42 1/2 Inches
Interior Depth	22 7/8 Inches
Interior Height	23 1/2 Inches
Work Surface Height	35 1/4 Inches
Amps	1.33 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
Backsplash	With Backsplash
BTU (LBP)	881 BTU
Capacity	11.2 cu. ft.
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Door Style	Swing
Door Type	Solid
Hinge Location	Left/Right
Horsepower	1/3 HP
Number of Doors	2 Doors
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	33 - 40 Degrees F

Features

- Strong and sleek 430 type stainless steel exterior with 3 1/2" backsplash
- 304 type stainless steel interior maintains temperatures from 33 to 40 degrees Fahrenheit
- Foamed-in-place polyurethane insulation
- Two epoxy-coated steel shelves accommodate up to 90 lb. each
- 115V; 1/3 hp; 1.33 Amps

Certifications



ETL US




5-15P



ETL Sanitation



Plan View

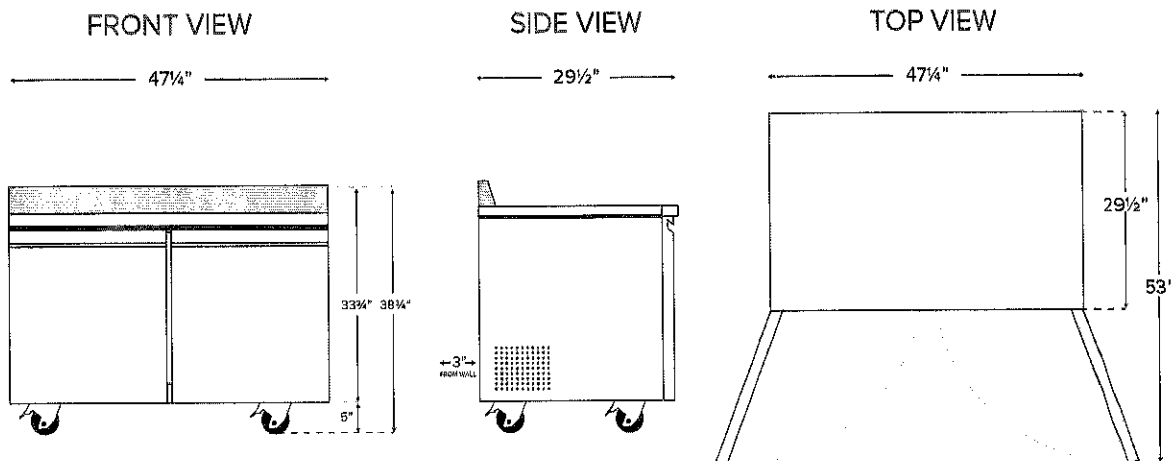

Notes & Details

Make food preparation as convenient as possible with the Avantco SS-WT-60F-HC 60" worktop freezer. With a spacious stainless steel worktop surface for slicing, dicing, assembling, mixing, and other food prep tasks, the unit features a 3 1/2" backsplash for wall protection and freezer storage space below. The freezer portion is readily accessible through the two doors, which each open up to a shelf that helps you organize your ingredients and best utilize the roomy interior. Plus, because they each accommodate up to 90 lb., the two epoxy coated steel shelves are well equipped for holding heavy bulk ingredients.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchens with ease. It features a type 430 stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with type 304 stainless steel, also offers the stability necessary for heavy, regular use.

This worktop freezer ensures optimal performance by operating with a 1/3 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from -8 to -1 degree Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to maintain interior temperatures.

Operation of the freezer is easy, thanks to a variety of special features, including an interior wall-mounted thermometer, auto-defrost, and pre-programmed digital controller. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This worktop freezer requires a 115V electrical connection for operation.



⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.



Item #: 178A49FHC Project: _____
Qty: _____ Date: _____ Approval: _____

Avantco A-49F-HC 54" Solid Door Reach-In Freezer

Item #178A49FHC

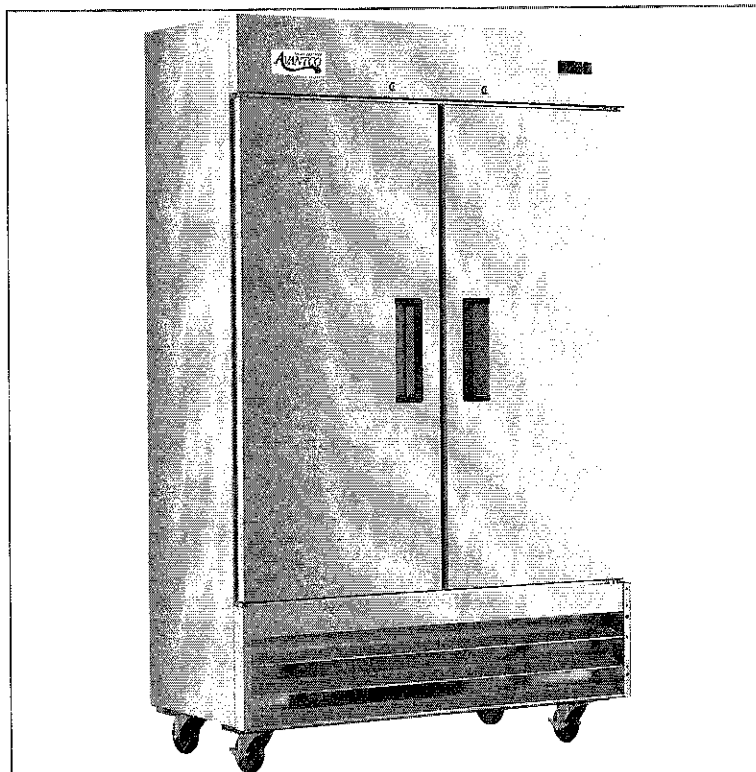

Technical Data

Width	54 Inches
Depth	32 1/4 Inches
Height	82 1/2 Inches
Interior Width	49 3/8 Inches
Interior Depth	27 1/8 Inches
Interior Height	53 1/2 inches
Amps	6.08 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	2614 BTU
Capacity	41.3 cu. ft.
Casters	With Casters
Color	Silver
Compressor Location	Bottom Mounted
Construction	Stainless Steel and Aluminum
Door Style	Swing
Door Type	Solid
Dutch Half Doors	Without Dutch Half Doors
Hinge Location	Left/Right
Horsepower	1 2/7 HP
Installation Type	Freestanding
Number of Doors	2 Doors
Number of Shelves	6 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Sections	2 Sections
Temperature Range	-8 -- -1 Degrees F
Type	Freezers

Features

- Corrosion-resistant stainless steel exterior with aluminum interior
- Features 2 self-closing and stay-open locking doors
- Includes 6 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- R-290 refrigerant; 115V; 1 2/7 hp; 6.08 Amps

Certifications



ETL US




5-15P



ETL Sanitation

Avantco Refrigeration

Plan View

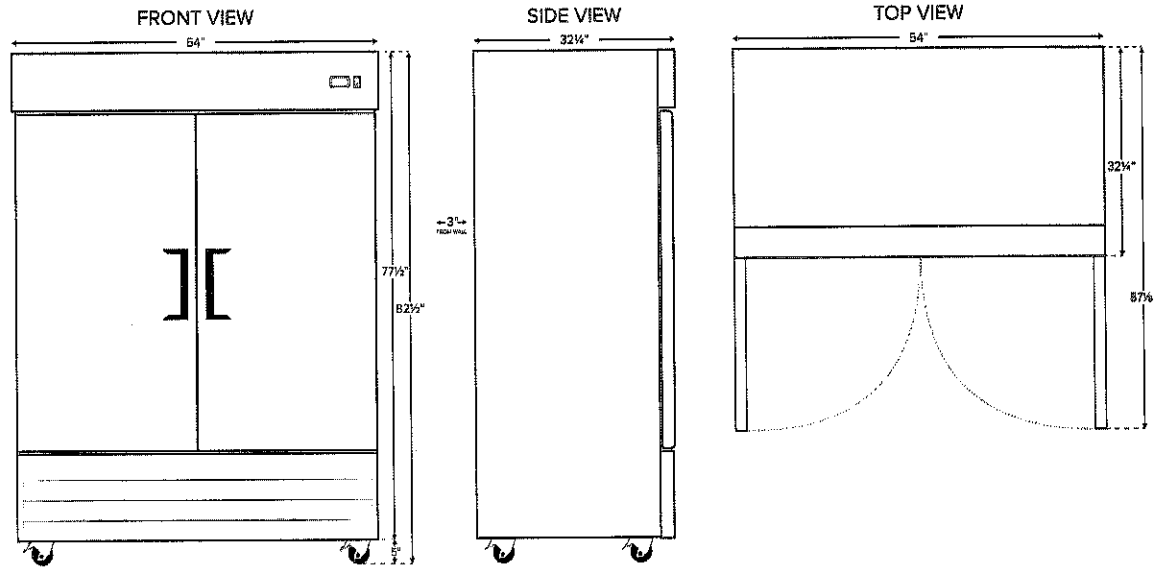

Notes & Details

Your establishment relies on refrigeration for proper food safety, and with this Avantco A-49F-HC 54" solid door freezer, you receive performance you can depend on! A painted aluminum interior gives you increased durability, while (2) 430 stainless steel doors and exterior sides give it a sleek appearance. For convenience, 6 epoxy coated shelves feature shelf clips for customization when desired.

Designed to maintain temperatures from -8 to -1 degree Fahrenheit, this freezer boasts a bottom-mounted 1 2/7 hp compressor that Uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include stay open doors with locks, automatic defrosting, and a digital temperature control with digital display. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.






Item #: 178SS2RHC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco SS-2R-HC 54" Stainless Steel Solid Door Reach-In Refrigerator

Item #178SS2RHC

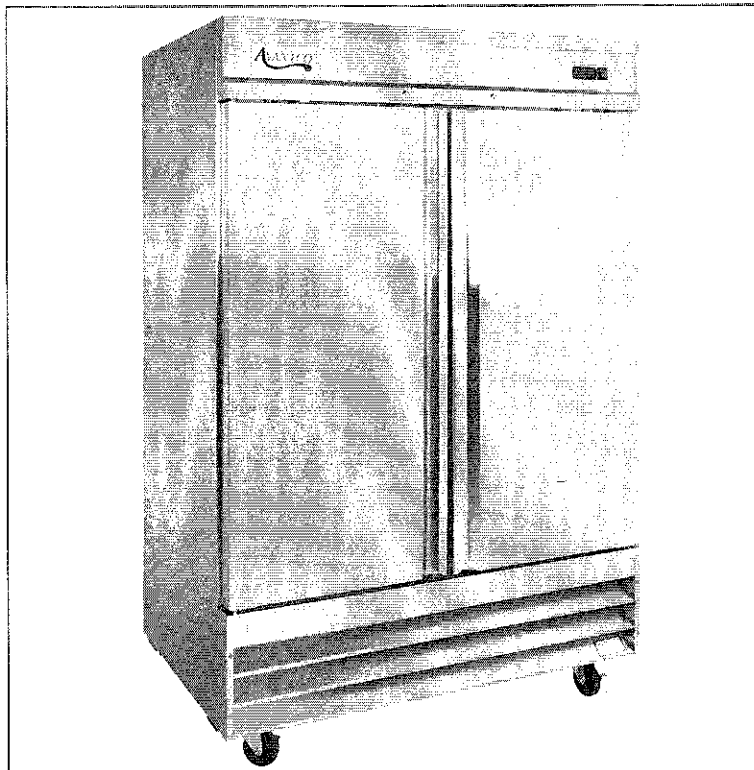

Technical Data

Width	54 Inches
Depth	32 1/4 Inches
Height	82 1/2 Inches
Interior Width	49 3/8 Inches
Interior Depth	27 1/8 Inches
Interior Height	60 1/4 Inches
Amps	3.14 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	1264 BTU
Capacity	46.7 cu. ft.
Casters	With Casters
Color	Silver
Compressor Location	Bottom Mounted
Construction	All Stainless Steel
Door Style	Swing
Door Type	Solid
Dutch Half Doors	Without Dutch Half Doors
Features	LED Lighting
Hinge Location	Left/Right
Horsepower	1/2 HP
Individual Shelf Capacity	120 lb.
Installation Type	Freestanding
Number of Doors	2 Doors
Number of Shelves	6 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Sections	2 Sections
Temperature Range	33 - 40 Degrees F
Type	Refrigerators

Features

- Corrosion-resistant stainless steel exterior and interior with LED lighting
- Features 2 self-closing and stay-open locking doors with full length stainless steel handle
- Perforated interior rear air duct for better air flow
- Digital temperature controller with automatic defrost function
- R290 refrigerant; 115V, 1/2 hp; 3.14 Amps

Certifications



ETL US & Canada



5-15P




ETL Sanitation

Avantco Refrigeration

Plan View



Avantco Refrigeration

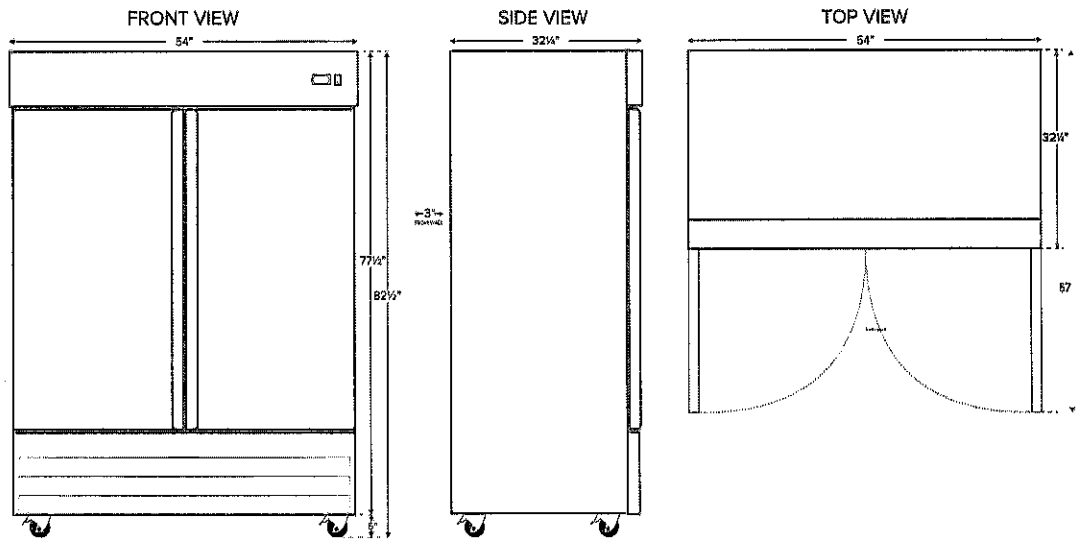

Notes & Details

Providing impressive performance and dependable durability, this Avantco SS-2R-HC 54" stainless steel solid door reach-in refrigerator is engineered to hold your cold food investments in a food safe environment. Designed with a 430 stainless steel door and exterior sides, the unit features a sleek appearance that's matched with its ability to withstand busy, heavy-use kitchens. Plus, the interior is 304 stainless steel, giving the unit superior corrosion resistance and cleanability; it won't degrade with or become damaged by the inevitable spills and messes. As a result, it's easier for your employees to maintain during the hustle and bustle of their daily tasks. For ultimate storage flexibility, this refrigerator even comes with 6 epoxy coated shelves with a versatile shelf slide design that can accept full size food pans! Designed for your utmost convenience, the unit is sure to accommodate your ever-evolving needs as your business grows, expands, and transforms over time. This unit also boasts interior LED lighting that automatically turns on and off when you open and close the door. This helps improve visibility and streamline your work flow.

Programmed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator ensures that all food products are held in a proper, food safe environment to preserve their quality and integrity. To help achieve this, the robust, bottom-mounted 1/2 hp compressor runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For maximum structural rigidity, the entire cabinet is foamed-in place using polyurethane insulation.

Making the refrigerator easy to monitor and operate, an automatic defrost feature and a digital temperature control with digital display are integrated for intuitive use. Each solid door includes a self-closing mechanism, which enables easy access at all times, and a set of casters provides the unit with mobility. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.

Item #: 194KMCF530LA Project: _____




Qty: _____ Date: _____ Approval: _____



Avantco Ice KMC-F-530-LA 30" Air Cooled Modular Full Cube Ice Machine with Ice Bin - 497 lb.

Item #194KMCF530LA

Avantco Ice Machines

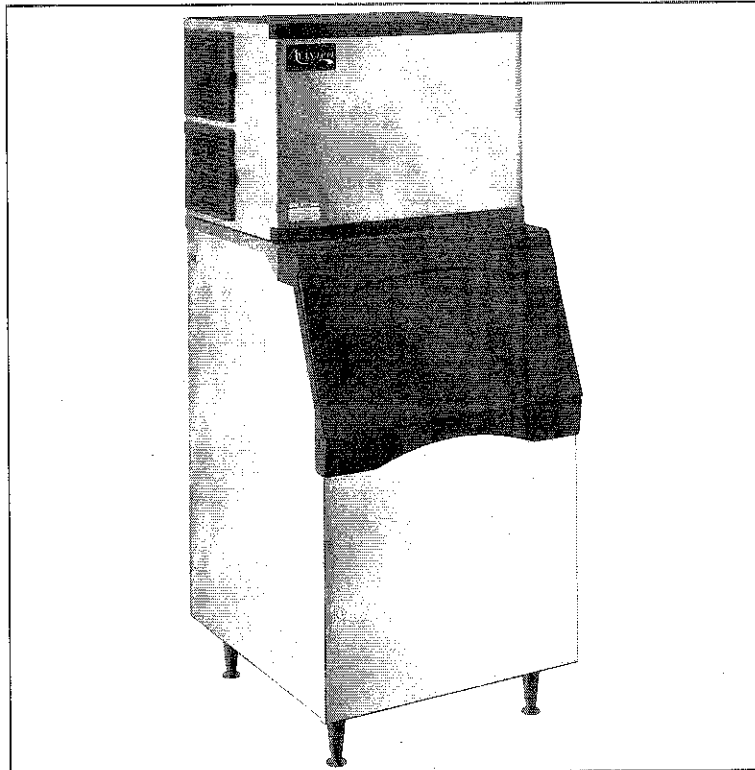

Technical Data

Width	30 1/2 Inches
Depth	34 Inches
Height	73 3/8 Inches
Bin Width	30 1/2 Inches
Ice Dispenser Width	30 1/2 Inches
Ice Machine Width	30 Inches
Bin Depth	34 Inches
Ice Machine Depth	24 3/8 Inches
Bin Height	51 Inches
Ice Machine Height	22 3/8 Inches
Amps	13.5 Amps
Phase	1 Phase
Voltage	115 Volts
24 Hour Ice Yield	497 Pounds
Ambient Temperature Range	40 - 90 Degrees F
Average Running Decibels	73 Decibels
Bin Storage Capacity	536 lb.
BTU Per Hour	3798 BTU
Color	Silver
Condenser Type	Air Cooled
Drain Outlet Size	3/4 Inches
Exterior Material	Roto Plastic Finish
Features	LED Lighting
Ice Type	Full Size Cubes
Installation Type	Modular
Interior Material	Polyethylene
Plug Type	NEMA 5-15P
Power kWh/100 lbs. Ice	4.7 kWh
Refrigerant Type	R-290
Type	Ice Machines with Bins
Water Pressure Range	18 3/4 - 80 PSI
Water Temperature Range	40 - 90 Degrees F
Water Usage	13.6 Gallons per 100 lbs.

Features

- Makes up to 497 lb. of full cube ice per day; Ice storage bin capacity 536 lb.
- Durable roto plastic finish exterior with a polyethylene interior
- Digital controller allows user to quickly identify issues and the current stage of production
- Includes bright LED lights and a removable air filter
- R290 refrigerant; 115V

Certifications



5-15P



ETL Sanitation



ETL US & Canada




3/4" Water Connection

Plan View




Avantco Ice Machines


FRONT VIEW

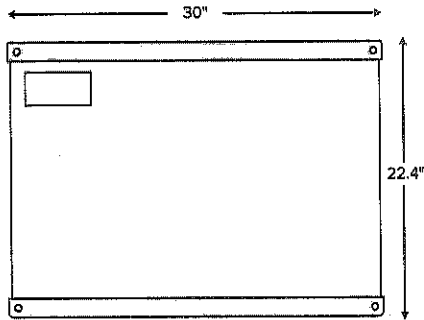


SIDE VIEW




TOP VIEW

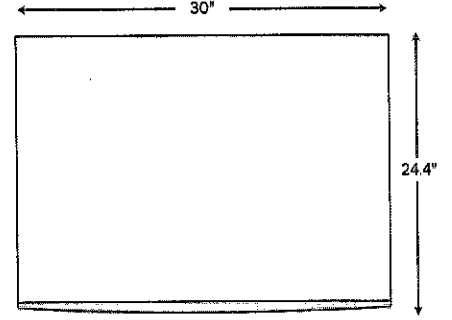


FRONT VIEW

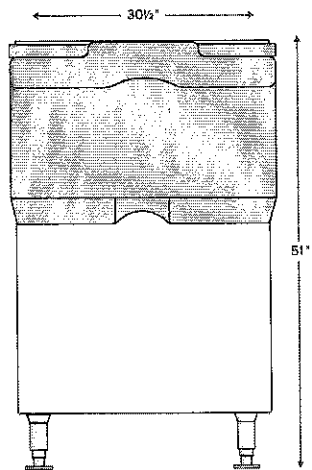

SIDE VIEW

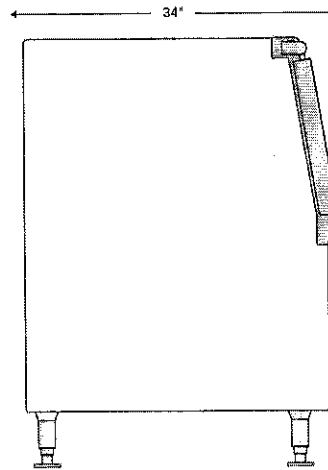

TOP VIEW

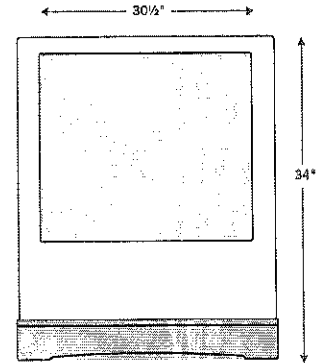



Avantco Ice Machines

Notes & Details

Make sure you've always got plenty of fresh ice on hand with the Avantco Ice KMC-F-530-LA 30" air cooled modular full cube ice machine with bin! Capable of producing up to 497 lb. of full cube ice per day, you'll always have plenty of ice to serve on demand at your restaurant, bar, or cafe. An included ice bin holds up to an impressive 536 lb. of ice, making it ideal for busy establishments that can not afford long periods of down-time while ice is being made. The ice bin features a durable roto plastic exterior with a polyethylene interior. Also included is an ice scoop and a hook to hang it on so it is always within convenient reach when you need it.

For ease of maintenance, a built-in diagnostic system will identify problems that your ice machine may be having and will display the issue on the digital controller so it can be repaired accordingly. This easy-to-use controller can also be used to monitor the current stage of ice production that your machine is in. It allows you to adjust the bridge thickness up or down to maximize your harvest into individual cubes of ice, rather than full sheets. It also initiates the cleaning cycle and displays what stage of the cycle you're in. Plus, the ice bin has a 3/4 FTP drain fitting.


The ice machine is constructed of durable roto plastic finish with a polyethylene interior to last in the busiest of commercial environments. A nickel plated evaporator and removable air filter make for quick and simple cleaning and maintenance. With (4) 6" adjustable legs, you can level your machine on uneven surfaces and have plenty of room to clean under it. This ice machine also comes with pre-drilled holes on the back of the unit to mount your OceanLoch water filter to the machine to ensure you are serving the cleanest and freshest ice possible. Designed for side-breathing and rear exhaust, you can avoid hot air being blown outward into your kitchen or service area. This unit requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.p65warnings.ca.gov.




SV-200 • SV-250 Selectable Ice/Beverage Dispensers with Ice Crusher


SV-200 • SV-250 Selectable Ice/Beverage Dispensers
with Ice Crusher

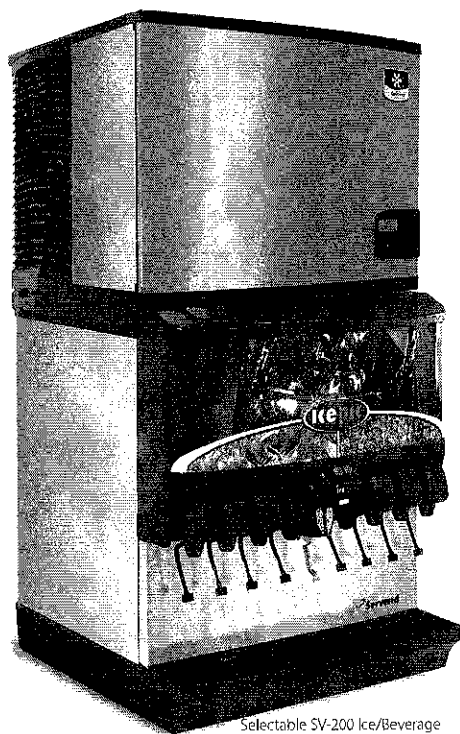



Selectable SV-200 Ice/Beverage
Dispenser with 5500 Ice Machine

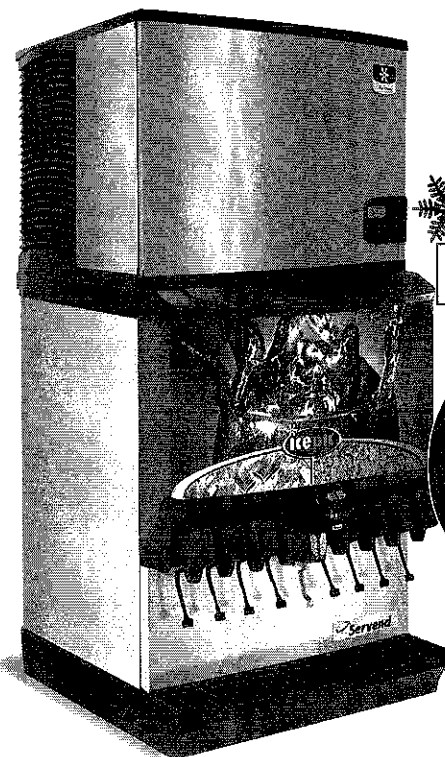

Selectable SV-250 Ice/Beverage
Dispenser with Indigo Ice Machine



Featuring
icepic®



Servend's patented icepic™ feature is the industry's only built-in ice crusher providing a selection of crushed or cubed ice from a single ice maker/ice-beverage dispenser combination.

Standard Features

- Up to 10 beverage valves in a 30" wide ice/beverage dispenser.
- Increased beverage cooling efficiency vs. nugget-style ice.
- Long-lasting LED lighting illuminates the merchandiser while reducing energy usage and lifetime costs.
- Servend's patented Flex manifold makes carbonated or non-carbonated flavor changes possible in minutes. Great for seasonal promotions!
- 200 or 250 lbs. of ice storage.





ISO 9001:2000
Quality System
Certified



SV-200 • SV-250 Selectable Ice/Beverage Dispensers with Ice Crusher

Specifications

	SV-200	SV-250
Standard Features	LED lighted merchandiser, icepic graphics, key switch, leg kit, and drain kit.	
Approx. Shipping Weights	304 lbs. / 138 kgs.	335 lbs. / 152 kgs.
Approx. Countertop Weight (w/o Ice)	235 lbs. / 107 kgs.	260 lbs. / 118 kgs.
Ice Storage Capacity	Up to 200 lbs. / 91 kgs.	Up to 250 lbs. / 114 kgs.
Electrical Requirements	Dispenser: 120V/60Hz/2.8FLA.	
Drain	Single 0.75" (1.91 cm) PVC (N.P.T.) drain fitting extends from drain pan. Units can be drained from the bottom or back of unit.	
Number of Valves	8 or 10	
Ice Machine Compatibility	Manual fill or top-mount with compatible ice machines. Contact MBE for adapter kit requirements for top-mounted ice machine applications.	
Manifold	8 valve 3-1-1-1-2 / 10 valve 3-1-2-1-3	
Options	Flomatic beverage valves. Both Flomatic 424 and 464 available in sanitary lever, push button, portion control, and autofill valve. Other valves available. Contact MBE for details. Other options: regulators, installation kits, and side splash panels, Americans with Disabilities Act (ADA) compliant selection touchpads.	

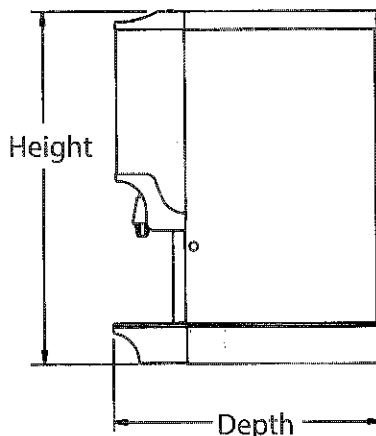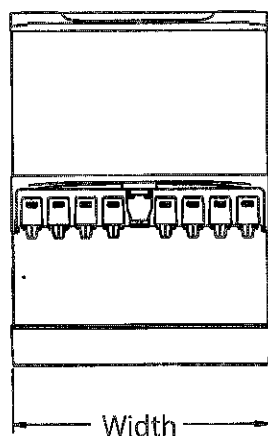

	SV-200	SV-250
Width	30.00"	30.00"
	76.20 cm	76.20 cm
Depth	31.13"	31.13"
	79.07 cm	79.07 cm
Height*	34.88"	40.88"
	88.60 cm	103.80 cm

*Height dimension without full lid.
Add 0.50" (1.27 cm) for full lid.