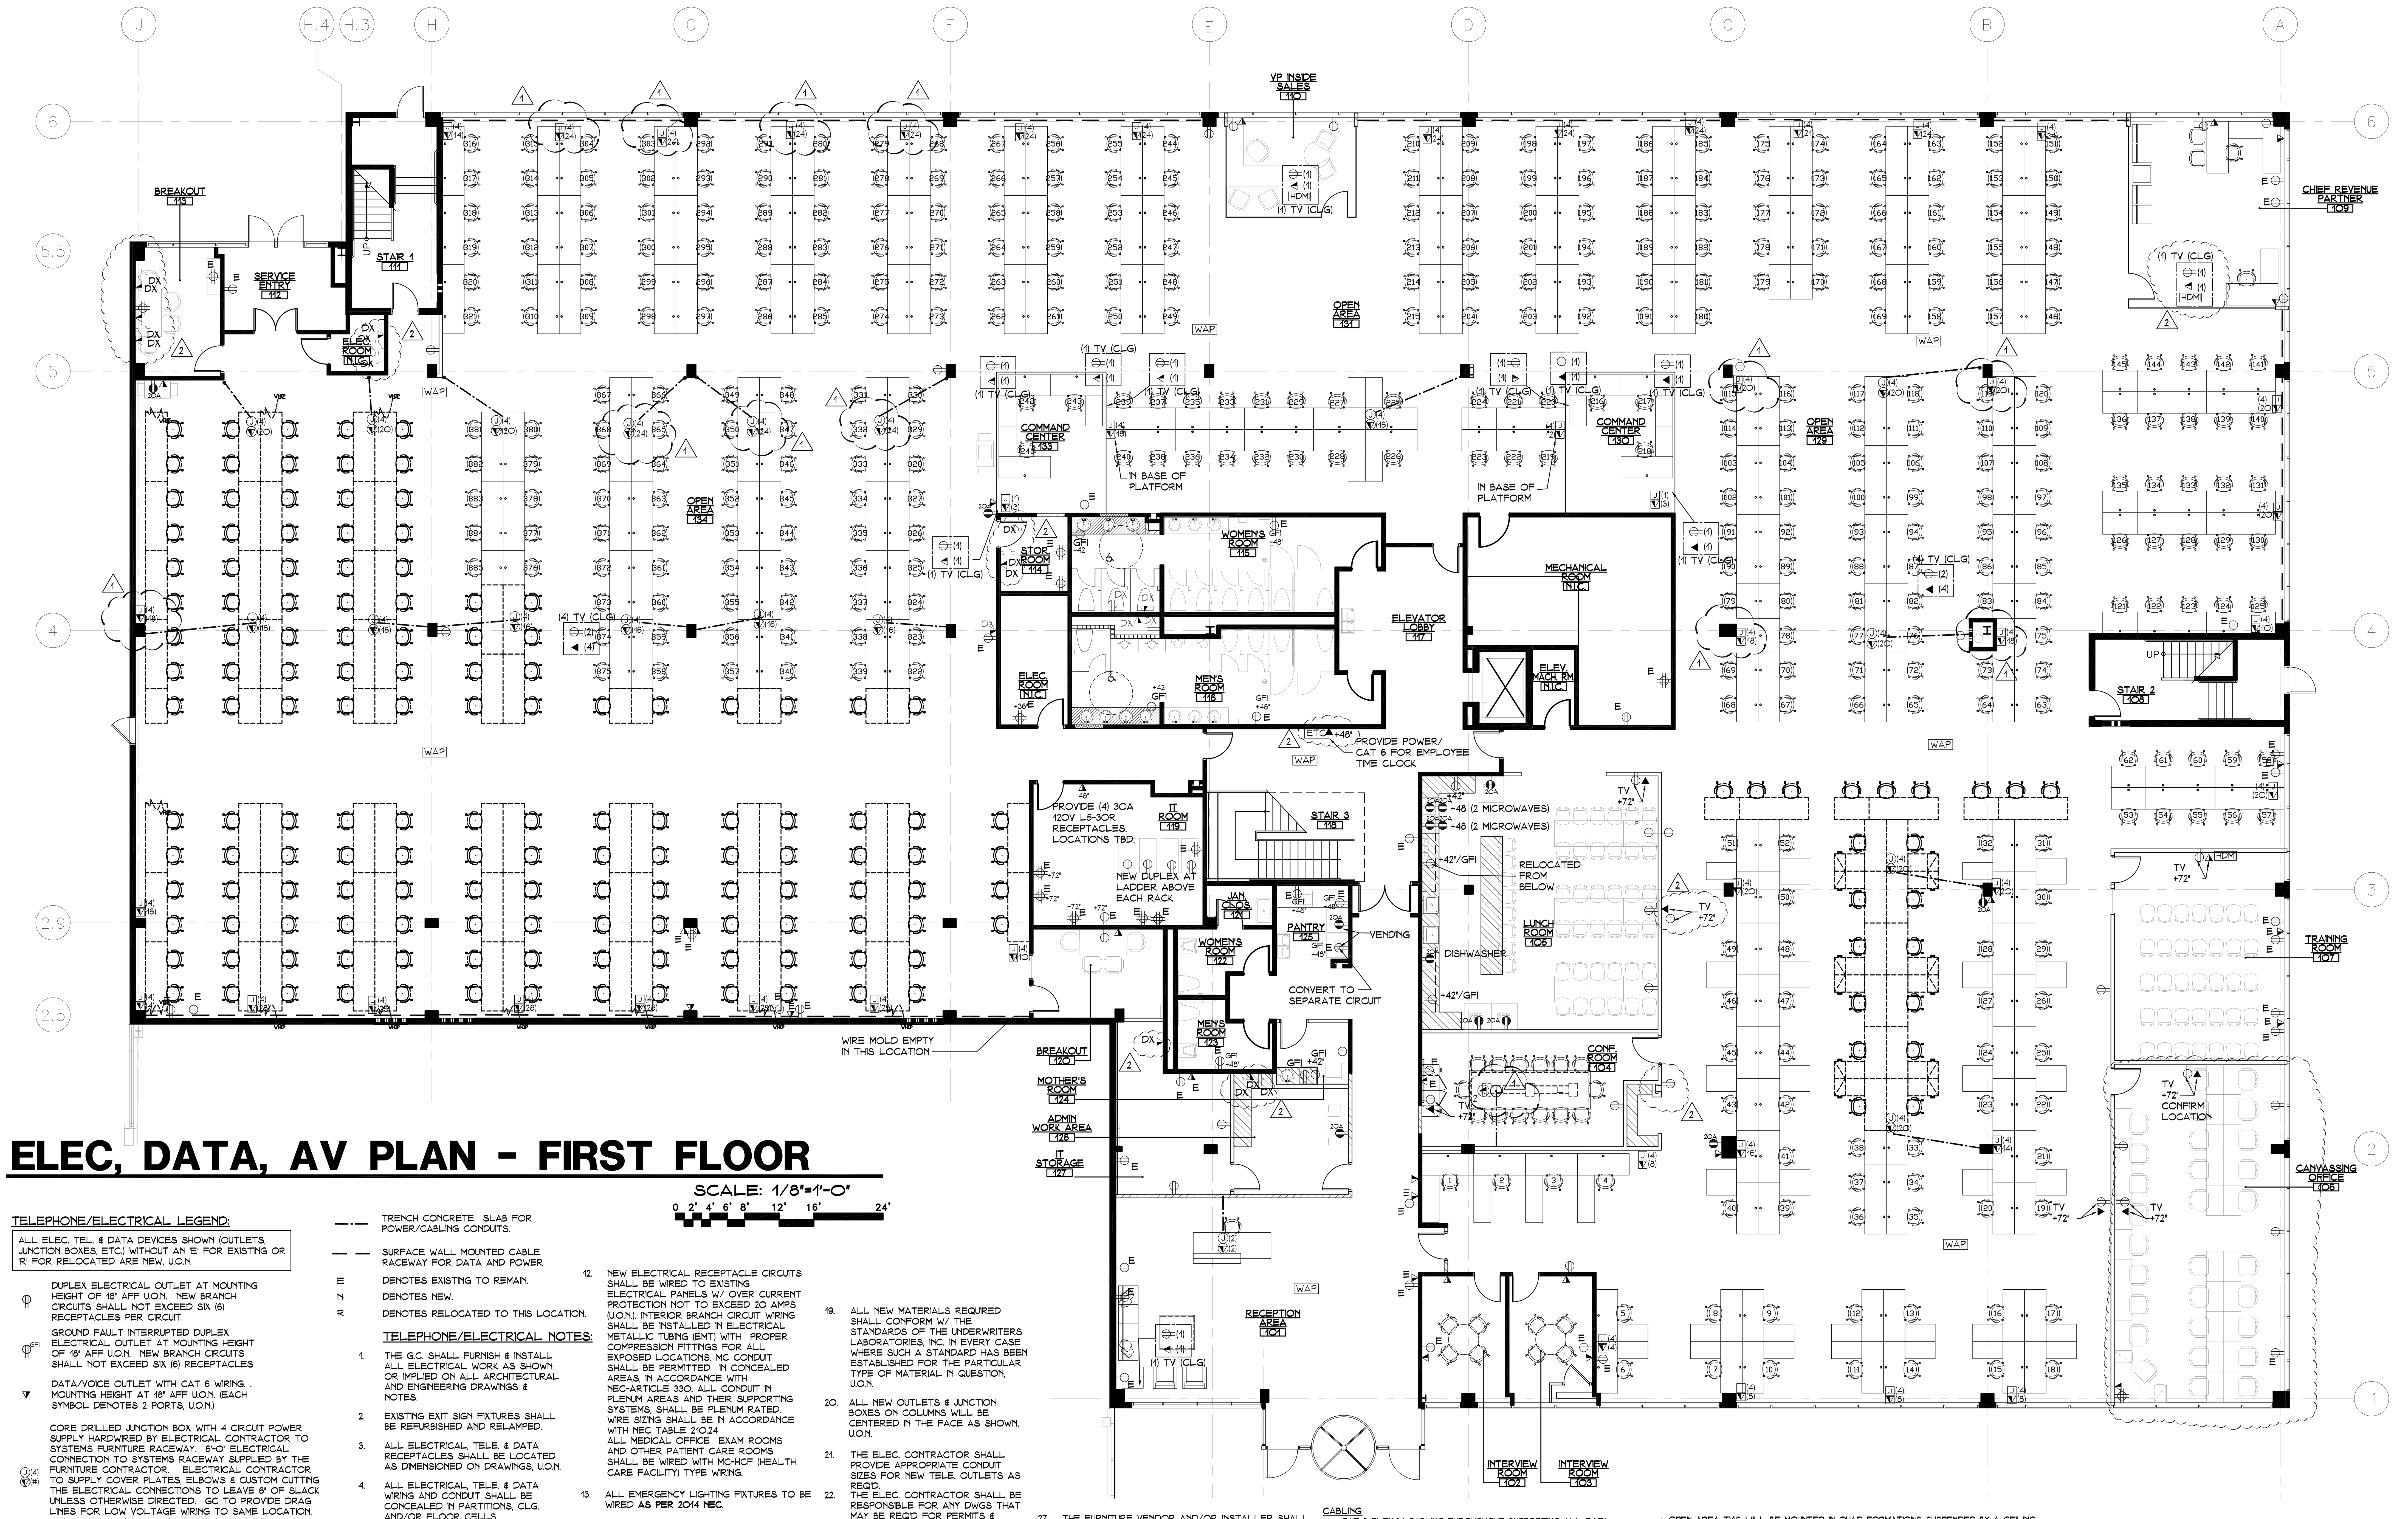

ELEC, DATA, AV PLAN - FIRST FLOOR

SCALE: 1/8"=1'-0"

0 2' 4' 6' 8' 12' 16' 24'

TELEPHONE/ELECTRICAL LEGEND:

ALL ELEC. TEL. & DATA DEVICES SHOWN (OUTLETS, JUNCTION BOXES, ETC.) WITHOUT AN 'E' FOR EXISTING OR 'R' FOR RELOCATED ARE NEW, U.O.N.

- DUPLEX ELECTRICAL OUTLET AT MOUNTING HEIGHT OF 18" AFF U.O.N. NEW BRANCH CIRCUITS SHALL NOT EXCEED SIX (6) RECEPTACLES PER CIRCUIT.
- GFI — GROUND FAULT INTERRUPTED DUPLEX ELECTRICAL OUTLET AT MOUNTING HEIGHT OF 18" AFF U.O.N. NEW BRANCH CIRCUITS SHALL NOT EXCEED SIX (6) RECEPTACLES
- DATA/VOICE OUTLET WITH CAT 6 WIRING. MOUNTING HEIGHT AT 18" AFF U.O.N. (EACH SYMBOL DENOTES 2 PORTS, U.O.N.)
- J(4) ▼(#) — CORE DRILLED JUNCTION BOX WITH 4 CIRCUIT POWER SUPPLY HARDWIRED BY ELECTRICAL CONTRACTOR TO SYSTEMS FURNITURE RACEWAY. 6'-0" ELECTRICAL CONNECTION TO SYSTEMS RACEWAY SUPPLIED BY THE FURNITURE CONTRACTOR. ELECTRICAL CONTRACTOR TO SUPPLY COVER PLATES, ELBOWS & CUSTOM CUTTING THE ELECTRICAL CONNECTIONS TO LEAVE 6" OF SLACK UNLESS OTHERWISE DIRECTED. GC TO PROVIDE DRAG LINES FOR LOW VOLTAGE WIRING TO SAME LOCATION. LOWER NUMBER(#) INDICATES TOTAL QUANTITY OF DATA PORTS WITH CAT 6 WIRING. VERIFY WITH TENANT VENDOR AND VERIFY REQUIRED INTERFERENCE PROTECTION AS WELL AS DIAMETER OF CORE DRILL AND CAPACITY OF SLEEVE PRIOR TO INSTALLATION. FIRE SAFE ALL SLAB PENETRATIONS. SEE ENGINEERING DRAWINGS CIRCUITING INFORMATION. (EXACT LOCATIONS TO BE COORDINATED WITH FURNITURE VENDOR)
- J(4) ▼(#) — JUNCTION BOX WALL MOUNTED WITH 4 CIRCUIT POWER SUPPLY TO BE HARDWIRED BY ELECTRICAL CONTRACTOR TO SYSTEMS FURNITURE RACEWAY. 6'-0" ELECTRICAL CONNECTION TO SYSTEMS RACEWAY SUPPLIED BY THE FURNITURE CONTRACTOR. CENTERLINE OF JUNCTION BOX TO BE 8" AFF WITH ELECTRICAL CONTRACTOR SUPPLYING COVER PLATES, ELBOWS & CUSTOM CUTTING THE ELECTRICAL CONNECTIONS TO LEAVE 6" OF SLACK UNLESS OTHERWISE DIRECTED. GC TO PROVIDE DRAG LINES FOR LOW VOLTAGE WIRING TO SAME LOCATION. LOWER NUMBER INDICATES TOTAL NUMBER OF DATA PORTS WITH CAT 6 WIRING. VERIFY WITH TENANT VENDOR AND VERIFY REQUIRED INTERFERENCE PROTECTION AS WELL AS CAPACITY OF SLEEVE PRIOR TO INSTALLATION. SEE ELEC. ENGINEERING DWGS FOR CIRCUITING. (EXACT LOCATIONS TO BE COORDINATED WITH FURNITURE VENDOR)
- (1) TV (CLG) — POWER AND (CAT6) ETHERNET DROP IN THE CEILING FOR NUMBER OF TELEVISIONS LISTED.
- ◄ TV — (CAT 6) ETHERNET DROP FOR TV IN WALL(CONFIRM HT.)
- FLUSH MOUNTED COMBINATION POWER/DATA/VOICE FLOOR OUTLET. (LOCATION TO BE COORDINATED WITH FURNITURE VENDOR
- WAP — WIRELESS ACCESS POINT.
- HDMI — HDMI CONNECTION
- ETC — EMPLOYEE TIME CLOCK
- —·— TRENCH CONCRETE SLAB FOR POWER/CABLING CONDUITS.
- — — SURFACE WALL MOUNTED CABLE RACEWAY FOR DATA AND POWER
- E — DENOTES EXISTING TO REMAIN.
- N — DENOTES NEW.
- R — DENOTES RELOCATED TO THIS LOCATION.

TELEPHONE/ELECTRICAL NOTES:

1. THE G.C. SHALL FURNISH & INSTALL ALL ELECTRICAL WORK AS SHOWN OR IMPLIED ON ALL ARCHITECTURAL AND ENGINEERING DRAWINGS & NOTES.
2. EXISTING EXIT SIGN FIXTURES SHALL BE REFURBISHED AND RELAMPED.
3. ALL ELECTRICAL, TELE. & DATA RECEPTACLES SHALL BE LOCATED AS DIMENSIONED ON DRAWINGS, U.O.N.
4. ALL ELECTRICAL, TELE. & DATA WIRING AND CONDUIT SHALL BE CONCEALED IN PARTITIONS, CLG. AND/OR FLOOR CELLS.
5. ELEC. CONTRACTOR TO COORDINATE HOT WATER HEATER REQUIREMENTS WITH PLUMBING CONTRACTOR & TO PROVIDE JUNCTION BOXES & CONNECTIONS ABOVE HUNG CEILING AS REQUIRED.
6. ALL ELECTRICAL, TELE. & DATA WIRING SHALL BE COORDINATED WITH AIR CONDITIONING WORK, CABINET WORK, ALL PARTITION WORK & SECURITY SYSTEMS, ETC. WHERE REQUIRED.
7. THE ELEC. AND/OR G.C. SHALL PROVIDE ALL CUTTING & PATCHING OF ALL CHASES IN FLOORS, WALLS & CEILINGS AS REQ'D.
8. CAP, FLUSH & FIRE STOP ALL FLR. OUTLETS NOT BEING REUSED.
9. ELEC. CONTRACTOR SHALL BE RESPONSIBLE FOR UPGRADING & INSPECTING EXISTING ELECTRICAL CONDITIONS, SUPPLIES, POWER PANELS, IF REQUIRED TO ACCOMMODATE NEW CONSTRUCTION.
10. COMPUTER WIRING/INSTALLATION BY TENANT. G.C. SHALL BE RESPONSIBLE FOR COORDINATING INSTALLATION OF COMPUTER WIRING W/ HIS TRADES & SUB-CONTRACTORS.
11. G.C. SHALL REMOVE & DISCARD ALL ELEC. FIXTURES & CLG. ASSEMBLIES AS REQ'D DUE TO NEW CONSTRUCTION - OWNER MAY REQUEST TO HAVE ANY ITEMS STORED FOR FUTURE USE.
12. NEW ELECTRICAL RECEPTACLE CIRCUITS SHALL BE WIRED TO EXISTING ELECTRICAL PANELS W/ OVER CURRENT PROTECTION NOT TO EXCEED 20 AMPS (U.O.N.). INTERIOR BRANCH CIRCUIT WIRING SHALL BE INSTALLED IN ELECTRICAL METALLIC TUBING (EMT) WITH PROPER COMPRESSION FITTINGS FOR ALL EXPOSED LOCATIONS. MC CONDUIT SHALL BE PERMITTED IN CONCEALED AREAS, IN ACCORDANCE WITH NEC-ARTICLE 330. ALL CONDUIT IN PLENUM AREAS AND THEIR SUPPORTING SYSTEMS, SHALL BE PLENUM RATED. WIRE SIZING SHALL BE IN ACCORDANCE WITH NEC TABLE 210.24 ALL MEDICAL OFFICE EXAM ROOMS AND OTHER PATIENT CARE ROOMS SHALL BE WIRED WITH MC-HCF (HEALTH CARE FACILITY) TYPE WIRING.
13. ALL EMERGENCY LIGHTING FIXTURES TO BE WIRED **AS PER 2014 NEC.**
14. MOUNTING DIMENSIONS SHOWN FOR OUTLETS, SWITCHES, THERMOSTATS, ETC., ARE CENTER OF ITEM, UON. ALL OUTLETS ARE TO BE MOUNTED VERTICALLY AT 18" AFF TO CENTER OF OUTLET, UON. OUTLETS LOCATED AT/ OR ABOVE 36" AFF TO BE HORIZONTALLY MOUNTED, U.O.N.
15. SET FACE OF ROUGHING BOX OF OUTLETS, SWITCHES, ETC. FLUSH W/ FACE OF APPLIED WALL FINISH INCLUDING PANELS, LAMINATES, ETC. PROVIDE CUTOUTS AND/ OR BLOCKING OF APPROPRIATE SIZE THAT CAN BE CLOSED COMPLETELY BY COVER PLATES. PROVIDE & INSTALL EXTENSION COLLARS AS REQUIRED.
16. WHEN DIMMER SWITCH OCCURS IN A ROOM, ALL OTHER SWITCHES TO MATCH DIMMER & SHALL BE GANGED TOGETHER ON COMPANION SWITCH PLATE.
17. RUN CONDUITS CONCEALED IN PARTITIONS ABOVE HUNG CLGS OR BELOW FINISHED FLRS. SUPPLY EMPTY CONDUITS W/ DRAG LINES, UON. INSTALL CONDUITS ABOVE HUNG CLG INDEPENDENT OF CLG SUSPENSION SYSTEM.
18. TELE. VENDOR TO COORDINATE TELE. EQUIPMENT LOCATION W/ BUILDING OWNERSHIP & SERVICE PROVIDER. TEL. VENDOR TO DETERMINE ELECTRICAL REQUIREMENTS FOR EQUIPMENT & COORDINATE W/ G.C.
19. ALL NEW MATERIALS REQUIRED SHALL CONFORM W/ THE STANDARDS OF THE UNDERWRITERS LABORATORIES, INC. IN EVERY CASE WHERE SUCH A STANDARD HAS BEEN ESTABLISHED FOR THE PARTICULAR TYPE OF MATERIAL IN QUESTION, U.O.N.
20. ALL NEW OUTLETS & JUNCTION BOXES ON COLUMNS WILL BE CENTERED IN THE FACE AS SHOWN, U.O.N.
21. THE ELEC. CONTRACTOR SHALL PROVIDE APPROPRIATE CONDUIT SIZES FOR NEW TELE. OUTLETS AS REQ'D.
22. THE ELEC. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DWGS THAT MAY BE REQ'D FOR PERMITS & INSTALLATION.
23. ALL EXISTING VOICE & DATA WIRING IS TO BE TIED. NEW VOICE & DATA IS TO BE TIED & SPOOLED. ALL VOICE/DATA WIRING SHALL BE SUPPORTED FROM THE BLDG. STRUCTURE BY THE TENANT.
24. ALL NEW LIGHT SWITCHES & ELECTRICAL OUTLETS TO BE INSTALLED IN **STRICT ACCORDANCE W/ NEW JERSEY UNIFORM CODE, CHAPTER 7.**
25. ALL ABANDONED ELECTRICAL AND VOICE DATA WIRING EXISTING ABOVE EXISTING CEILINGS SHALL BE DEMOLISHED.
26. THE ELECTRICAL SUBCONTRACTOR SHALL REVIEW ALL ELECTRICAL POWER, LIGHTING AND FURNITURE PLANS FOR ACCURACY. ANY CONFLICTS, OBVIOUS OMISSIONS OR QUESTIONS REGARDING CIRCUITING OR SWITCHING SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT PRIOR TO SUBMITTING A BID PRICE FOR THE WORK. NO CLAIM FOR AN EXTRA COST WILL BE ACCEPTED DUE TO THE ELECTRICAL SUBCONTRACTORS FAILURE TO DO SO AFTER THE CONTRACTORS PROPOSAL IS SUBMITTED.
27. THE FURNITURE VENDOR AND/OR INSTALLER SHALL REVIEW ALL ELECTRICAL POWER, TELEPHONE, LIGHTING AND FURNITURE PLANS FOR ACCURACY WHETHER THE FURNITURE PROVIDED WILL BE NEW, USED OR RELOCATED. ANY CONFLICTS WITH, INCLUDING BUT NOT LIMITED TO LIGHTING, ETC., OBVIOUS OMISSIONS OR QUESTIONS REGARDING CIRCUITING, AND CONNECTIONS WHETHER VIA WHIPS FROM WALL MOUNTED "J" BOXES, WHIPS FROM FLOOR POKE THROUGHS (OR VIA POWER POLES IF DIRECTED BY LANDLORD) SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT FOR CLARIFICATION PRIOR TO SUBMITTING A BID PRICE FOR THE WORK. NO CLAIMS FOR AN EXTRA COST WILL BE ACCEPTED, DUE TO THE FURNITURE VENDOR'S AND/OR INSTALLER'S FAILURE TO DO SO AFTER THE PROPOSAL IS SUBMITTED.
28. IT IS THE RESPONSIBILITY OF THE ELECTRICAL CONTRACTOR AND THE FURNITURE VENDOR/INSTALLER TO COORDINATE THEIR WORK TO INSURE ALL NECESSARY CIRCUITRY, COMPONENTRY AND CONNECTIONS COME TOGETHER TO ACHIEVE A COMPLETE, WORKMAN LIKE INSTALLATION.
29. IT IS THE RESPONSIBILITY OF THE CONTRACTOR, ALL THE SUBCONTRACTORS AND SUBORDINATE SUBCONTRACTORS TO THOROUGHLY REVIEW ALL PLANS, DRAWINGS, AND TITLE, LEGEND AND NOTES PAGES, DETAIL DRAWINGS, ETC. ISSUED AS PART OF THIS SET OF CONSTRUCTION DOCUMENTS IN ORDER TO FULLY UNDERSTAND THE SCOPE OF THEIR WORK AS WELL AS TO FULLY UNDERSTAND THE WORK OF OTHER TRADES AS IT MAY EFFECT THEIR WORK. THE SUBMISSION OF A BID WILL EVIDENCE THE FACT THAT ALL CONSTRUCTION DOCUMENTS HAVE BEEN REVIEWED. NO CLAIM OF ADDITIONAL EXPENSE WILL BE ACCEPTED FROM THE CONTRACTOR OR SUBCONTRACTOR OR SUBORDINATE SUBCONTRACTOR WHO HAS FAILED TO FAMILIARIZE ITSELF WITH THE WORK OF OTHER TRADES.

CABLING

- CAT 6 PLENUM CABLING THROUGHOUT SUPPORTING ALL DATA DROPS, IP CAMERAS, TV LOCATIONS AND WIRELESS ACCESS POINTS.
- CABLING SHOULD BE SUPPORTED UTILIZING J-HOOKS WITHIN THE CEILINGS AS WELL AS MEETING MINIMUM CODE REQUIREMENTS. CABLE TRUNKS MUST BE SECURED EVERY 6FT WITH TIE WRAPS EXCEPT FOR IDF AND MDF LOCATIONS WHICH WILL REQUIRE VELCRO.
- DROP LOCATIONS FOR TV'S, ACCESS POINTS AND INTERIOR CAMERAS SHOULD BE TERMINATED VIA BISCUIT JACK WITHIN THE CEILING LOCATION AS PER PLAN. EXTERIOR CAMERAS WILL BE TERMINATED ONCE PASSED THROUGH TO THE OUTSIDE CAMERA HOUSING. (RJ45 MODULAR CONNECTION).
- CABLING MUST BE TESTED AND LABELED ACCORDINGLY. (LABELING SEQUENCE WILL BE PROVIDED BY MOMENTUM SOLAR)
- ALL CAT6 CABLING MUST BE TERMINATED TO 568B AND SECURED IN A CLEAN MANNER
- CABLING MUST MAINTAIN PROPER TRUNKING IN PARALLEL AND PERPENDICULAR METHODS AVOIDING DIAGONAL PATHWAYS. CABLING WITHIN OFFICE SPACES, CONFERENCE ROOMS AND CEILING DEVICES SHALL HAVE A MINIMUM OF 10FT SERVICE LOOPS FOR RELOCATION PURPOSES. AS WELL AS BEFORE COMING DOWN THE WALL TO FEED GROUPED WORKSTATIONS.

AUDIO/VIDEO

- 70 VOLT IN-CEILING SPEAKERS WILL BE INSTALLED THROUGHOUT OPEN AREAS ON THE 1ST AND 2ND FLOOR CANVASSING THE FOLLOWING AREAS: (1ST FLOOR) INSIDE SALES, CALL CENTER, RETAIL SALES, (2ND FLOOR) DESIGN & PROPOSALS, CUSTOMER SERVICE, OPERATIONS, SITE ASSESSMENT, MARKETING, INSPECTIONS AND IT. CEILING SPEAKERS MUST BE INSTALLED USING TILE BRIDGING AND SAFETY WIRE. AUDIO CABLING (PLENUM RATED) PATHWAYS MUST BE INDEPENDENT OF ANY DATA, FIRE, INTRUSION AND ELECTRICAL CABLING. CABLING MUST BE SUPPORTED VIA J-HOOKS AND MAIN TRUNKS SHALL BE TIE WRAPPED EVERY 6FT.
- TV'S THAT ARE IN THE OPEN AREAS WILL REQUIRE 1 CAT6 CABLE FROM THE IT CLOSET AND MUST BE TERMINATED ON THERE OWN PATCH PANEL. LABELING SCHEME TV-1, TV-2 ETC....
- 1ST FLOOR AUDIO SYSTEM WILL BE 1 ZONE AND 2ND FLOOR WILL BE A 2ND ZONE CONTROLLED BY SONOS. (TO BE SUPPLIED BY MOMENTUM).
- OPEN AREA TV'S WILL BE MOUNTED IN QUAD FORMATIONS SUSPENDED BY A CEILING DROP DOWN POLE MOUNT MANUFACTURED BY CRIMSON (5 LOCATIONS AS PER PLAN). EACH TV WILL REQUIRE A SINGLE CAT6 CABLE FROM THE IT CLOSET WHICH WILL SUPPORT A THIN CLIENT PC. STRUCTURAL IN-CEILING SUPPORT AND ELECTRIC TO BE PROVIDED BY GC. MOMENTUM SOLAR WILL PROVIDE THE FOLLOWING EQUIPMENT:
  - 20 X 49' TV'S
  - CEILING QUAD MOUNT. CUT SHEET WILL BE PROVIDED.
  - VENDOR TO PROVIDE 1 CAT6 CABLE FROM TV TO IT CLOSET AND LABOR

NETWORK IT CLOSETS

- MOMENTUM SOLAR WILL PROVIDE AND INSTALL ALL NETWORK EQUIPMENT INCLUDING NETWORK SWITCHES AND WIRELESS ACCESS POINTS.
- WIRELESS ACCESS POINTS WILL REQUIRE 1 CAT6 CABLE FROM THE IT CLOSEST TO THE CEILING LOCATIONS AS PER PLAN. (PROVIDED BY IT VENDOR).
- FIBER FEED WILL BE REQUIRED BETWEEN BOTH 1ST AND 2ND FLOOR IT CLOSETS. 12 STRAND MULTIMODE FIBER AND 2 X 1U FIBER PANELS TERMINATED WITH SC CONNECTIONS.
- FIBER TRAYS SHALL BE INSTALLED IN RELAY RACK "C" IN BOTH IT CLOSETS.
- 1ST FLOOR WILL TERMINATE ON ITS OWN 24 PORT PATCH PANEL AND 2ND FLOOR WILL ALSO BE TERMINATED ON ITS OWN 24 PORT PATCH PANEL. PROVIDED BY IT VENDOR
- IT VENDOR SHALL PROVIDE A LADDER TRAY SYSTEM IN BOTH IT CLOSETS AS WELL AS 4 RELAY RACKS PER CLOSET.
- ALL DUPLEX WORKSTATION JACKS WILL BE LABELED STARTED WITH THE FLOOR LEVEL AS PER EXPAMPLE; 1ST FLOOR LABELING SCHEME (1-1A, 1-1B ETC...) 2ND FLOOR LABELING SCHEME (2-1A, 2-1B ET....).
- JACKS THAT ARE LABELED "A" WILL BE TERMINATED ON 48 PORT PATCH PANELS IN RELAY RACK A. JACKS THAT ARE LABELED "B" WILL BE TERMINATED ON 48PORT PATCH PANELS IN RELAY RACK "B"
- VERTICAL AND HORIZONTAL MANAGEMENT BARS WILL BE REQUIRED BETWEEN ALL PATCH PANELS AND RELAY RACKS.
- IN EACH IT CLOSET RELAY RACKS "C" AND "D" WILL BE RESERVED FOR NETWORK EQUIPMENT.
- CABLING THROUGHOUT THE IT CLOSETS MUST BE SECURED WITH VELCRO.
- 48 PORT PATCH PANELS SHALL BE INSTALLED WITH LACER BARS FOR PROPERLY SECURING ALL CABLING VIA VELCRO.
- IT VENDOR SHALL PROVIDE ALL HARDWARE AND LABOR NECESSARY FOR BOTH IT CLOSETS
- GC TO PROVIDE POWER REQUIREMENTS ATTACHED TO LADDER TRAY SYSTEM.

TYP. OUTLETS PER W.S

CONFIRM WITH FURNITURE VENDOR/OWNER

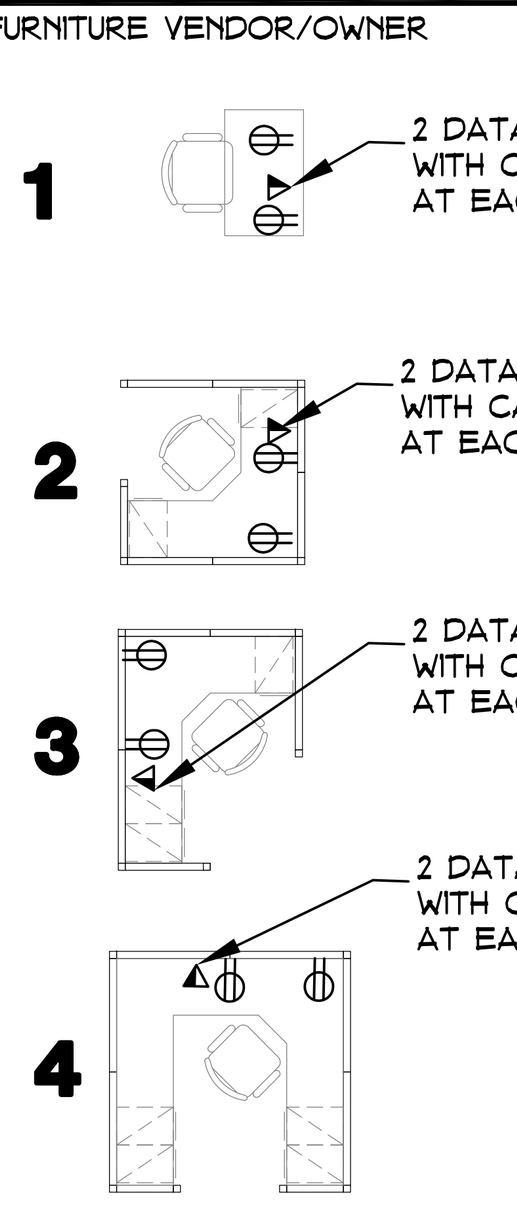

EMPLOYEE TIMECLOCK (ETC)

- ONE TIMECLOCK ON THE FIRST FLOOR BY THE STAIRS AND ONE TIMECLOCK ON THE SECOND FLOOR BY THE STAIRS WILL REQUIRE 1 CAT6 CABLE FOR EACH AS PER PLAN.

THE INTENT OF THIS SET OF CONSTRUCTION DOCUMENTS IS TO PROVIDE A COMPLETE AND PROPERLY FUNCTIONING SPACE TO BE UTILIZED FOR ITS DESIGNED PURPOSE. THE GENERAL CONTRACTOR, CONSTRUCTION MANAGER, SUB-CONTRACTOR(S), SUPPLIER(S), AND VENDOR(S) SHALL PROVIDE ALL LABOR AND MATERIALS NECESSARY TO ACHIEVE A FINISHED PRODUCT CAPABLE OF RECEIVING A CERTIFICATE OF OCCUPANCY. EACH CONTRACTOR IS OBLIGATED TO EXAMINE THE PLANS AND IF NECESSARY, VISIT THE SITE(S), SO TO BE FAMILIAR WITH THE ACTUAL CONDITIONS AND REQUIREMENTS OF THE PROJECT. ANY ALLEGED DISCREPANCIES, AMBIGUITIES OR UNKNOWNS, SHALL BE IMMEDIATELY CALLED TO THE ATTENTION OF AZTEC ARCHITECTS, P.C., SO THAT THE MATTER MAY BE RESOLVED PRIOR TO THE SUBMISSION OF A BID PROPOSAL. EACH CONTRACTOR, BY SUBMISSION OF THEIR BID, SHALL ACKNOWLEDGE THAT THESE DOCUMENTS ARE AN ADEQUATE DEFINITION OF THE SCOPE OF WORK. ADDITIONAL COST CLAIMS, BASED ON ANY DEFICIENCY OF CONSTRUCTION DOCUMENTS, ACTUAL OR NOT, WILL NOT BE CONSIDERED.

ISSUE FOR PERMIT 2-20-18

Typical Drawing Legend

FOR REFERENCE ONLY, REFER TO TITLE SHEET FOR EXACT DRAWING LIST

INTERIOR PROJECTS		BASE BUILDING	
ICS-1/0.1	COVER SHEET	CS-1/0.1	COVER SHEET
ITL-2/0.1	TITLE SHEET	TL-2/0.1	TITLE SHEET
INL-3/0.1	GENERAL NOTES	NL-3/0.1	GENERAL NOTES
DPL-4/1.1	DEMOLITION PLAN	SI-4/0.1	SITE PLAN
CPL-5/1.1	CONSTRUCTION PLAN	DM-5/1.1	DEMOLITION PLAN
RCP-6/1.1	REFLECTED CEILING PLAN	FL-6/1.1	FLOOR PLAN
ETD-7/1.1	ELEC, TEL & DATA PLAN	RP-7/0.1	ROOF PLAN
FNP-8/1.1	FINISH PLAN & ELEV.	EL-8/1.1	ELEVATIONS
DET-9/1.1	DETAILS	SC-9/1.1	SECTIONS
MWP-10/1.1	MILLWORK DETAILS & ELEV.	DT-10/1.1	DETAILS
RRP-11/1.1	RESTROOM PLANS & ELEV.		
FPP-12/1.1	FURNITURE PLACEMENT PLAN		
FIP-13/1.1	FURNITURE INSTALLATION PLAN		
FCP-14/1.1	FURNITURE COMPONENT PLAN		
EGP-15/1.1	EGRESS PLAN		
DWS-16/1.1	DOOR & WINDOW SCHEDULE		
STEP-17/1.1	STAIR PLAN & DETAILS		
RFP-18/1.1	RAISED FLOOR PLAN		
CAP-19/1.1	CAGE PLAN & DETAILS		
RKP-20/1.1	RACK & CABINET PLAN		
FZP-21/1.1	FIRE ZONING/COMPARTMENTAL PLAN		
SEP-22/1.1	SECURITY PLAN		
SLP-23/1.1	SIGNAGE LOCATION PLAN		
PRD-24/0.1	PLUMBING RISER DIAGRAM		
ECP-25/0.1	ENERGY COMPLIANCE PLAN		

CPL-5/1.1

Drawing Type — Section Number — Drawing Number — Floor

Seal & Signature:

CHARLES OTIS LOGAN JR. AIA ARA
N.J. REGISTRATION NO. AI09529
N.Y. REGISTRATION NO. 16446-I
PA. REGISTRATION NO. RA-014467-B

KURT M. KALAFSKY AIA CSI
N.J. REGISTRATION NO. AI12598
N.Y. REGISTRATION NO. 025515
CT. REGISTRATION NO. 8504
PA. REGISTRATION NO. RA-015368-B
NCARB CERTIFICATE #47021

CA #21AC00057200

Architects/Consultant:

AZTEC
Woodbridge Place
517 Route One South
Iselin, New Jersey 08830
Voice: (732) 636-8989
Fax: (732) 636-7755

Project Title and Location: 3100 HAMILTON BLVD SOUTH PLAINFIELD, NEW JERSEY

Building Owner:

Tenant/Occupant: MOMENTUM SOLAR

Drawing Title/Floor: ELEC, DATA, AV PLAN FIRST FLOOR

No	Revision	Date
2	TENANT CHANGES	5/31/18
1	FURNITURE LAYOUT UPDATE	5/25/18

Initial Dwg Date: JANUARY 8, 2018	Scale: 1/8"=1'-0"
Job No.: 29907	Chk By: SB
Drawn By: AFC	Team Leader: AFC

PLAN NORTH

Dwg No: ETD-7/1.1

Dwg File:	PIC:
07-ETD-1.1 3100 HAMILTON BLVD	COL

THIS DRAWING AND ITS CONTENTS, INCLUDING BUT NOT LIMITED TO ALL PATENTABLE FEATURES, SEPARATELY OR COLLECTIVELY SHOWN, CONSTITUTE THE ORIGINAL AND UNPUBLISHED PROPERTY OF AZTEC ARCHITECTS, L.L.C. THIS DRAWING MAY NOT BE DISCLOSED, REPRODUCED IN WHOLE OR PART OR EMPLOYED FOR ANY PURPOSE OTHER THAN SPECIFICALLY PERMITTED BY WRITTEN CONSENT OF AZTEC ARCHITECTS, LLC AND IS LOANED SUBJECT TO RETURN ON DEMAND.