Parking

Elevators

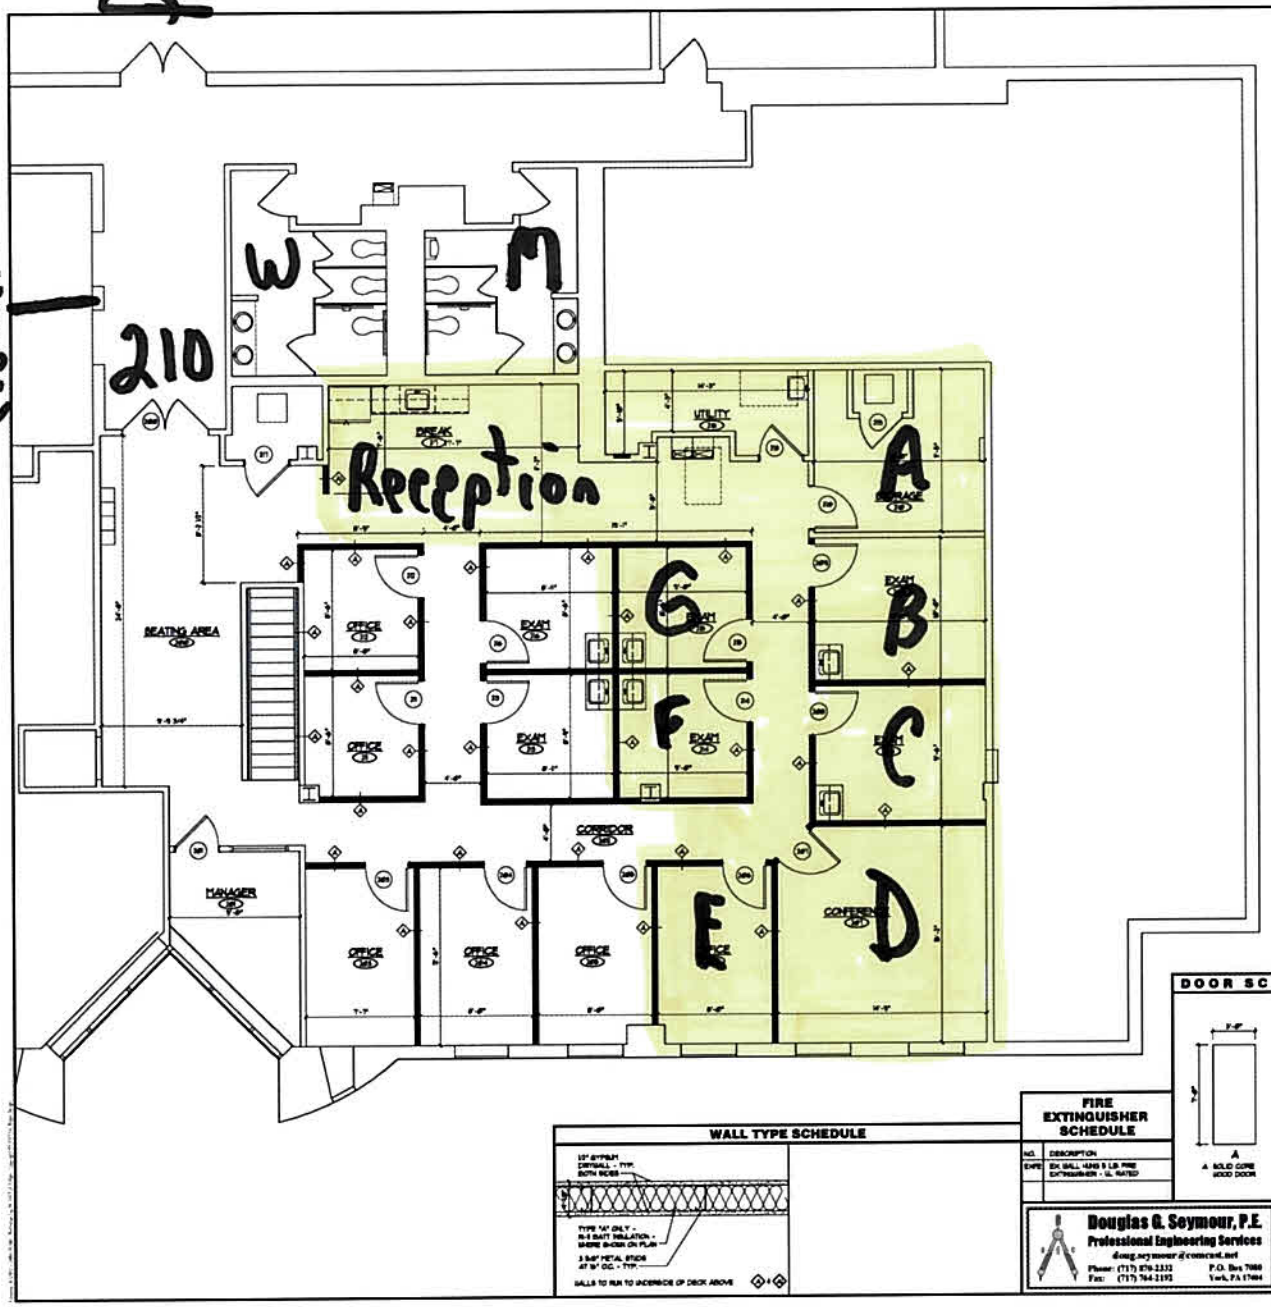

DOOR FRAME SCHEDULE

DOOR NO	SIZE W	SIZE H	SIZE T	TYPE	MAT	GLASS	LOUVER S	LOUVER N	FRAME TYPE	FRAME MAT	SPEC COMMT	HDW GROUP	REMARKS
300	3'0	84	1 3/4"	EX	MET	---	---	---	Ex	MET	---	8	# EX. PUBLIC HARDWARE TO REMAIN
301	36	84	1 3/4"	EX	WD	---	---	---	Ex	MET	---	8	# ADA KEYED LOCKSET LEVER
302	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
304	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
305	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
306	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
307	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
308	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
309	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
310	36	84	1 3/4"	EX	WD	---	---	---	Ex	MET	---	8	# ADA STORAGE LOCKSET LEVER
21	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
22	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
23	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
24	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
25	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
26	36	84	1 3/4"	A	WD	---	---	---	A	MET	---	8	# ADA KEYED LOCKSET LEVER
29	36	84	1 3/4"	EX	WD	---	---	---	Ex	MET	---	8	# ADA STORAGE LOCKSET LEVER
315	36	84	1 3/4"	EX	WD	---	---	---	Ex	MET	---	8	# ADA STORAGE LOCKSET LEVER

ROOM FINISH SCHEDULE

NO.	NAME	BASE FLR	FIN FLR	BASE	WALL	FIN	CLG	FIN	WST	TRIM	FIN	REMARKS
300	SEATING AREA	EX	EX CPT	V	EX GPDW	EX PNT	EXP	EX	EX	EX	EX	# REMOVE EXISTING GRID
301	MANAGER	EX	EX CPT	V	GPDW	PNT	EXP	EX	EX	EX	EX	
302	CORRIDOR	EX	CPT	V	GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
303	OFFICE	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
304	OFFICE	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
305	OFFICE	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
306	OFFICE	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
307	CONFERENCE	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
308	EXAM	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
309	EXAM	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
310	STORAGE	EX	EX	EX	EX	EX	EXP	EX	EX	EX	EX	
21	EXAM	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
22	EXAM	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
23	EXAM	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
24	EXAM	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
25	EXAM	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
26	EXAM	EX	CPT	EX V	EX GPDW	PNT	EXP	EX	EX	MET	PNT	# REMOVE EXISTING GRID
27	BREAK	EX	EX	EX	EX	EX	EXP	EX	EX	EX	EX	
29	UTILITY	EX	EX	EX	EX	EX	EXP	EX	EX	EX	EX	

DOOR SCHEDULE

JAMB SCHEDULE



WALL TYPE SCHEDULE

FIRE EXTINGUISHER SCHEDULE

NO.	DESCRIPTION
EXFE	EX. WALL HUNG 5 LB. FIRE EXTINGUISHER - UL RATED

Douglas G. Seymour, P.E.
Professional Engineering Services
doug.seymour@comcast.net
Phone: (717) 870-2333
Fax: (717) 764-2193
P.O. Box 7080
York, PA 17404

Eric Brown DESIGNS
RESIDENTIAL & COMMERCIAL DESIGN • PERMIT DRAWINGS • RENDERINGS
LLC

SECOND FLOOR PLAN & SCHEDULES
TENANT FITOUT FOR
40 YORK ROAD U2 L.L.C.
40 YORK ROAD, BALTIMORE COUNTY
TOWSON, MARYLAND 21204-5243

REVISIONS:

DRAWN BY: EB
PROJECT NO: 2446
DATE: 9/14/2023
SHEET NO: A-4